
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Elastic Rubber on Aluminium Plate Swivel Castor 160mm 300kg Load

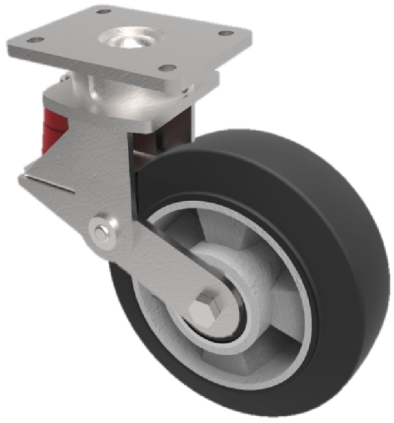

Product code: BZKL160ERBJSPR

Fabricated swivel castor with top plate fixing fitted with a 160mm x 50mm black high elastic natural 65 shore A rubber tyred tyred aluminium centred wheel with ball bearings overall height 188mm/208mm, plate size 138mm x 110mm, hole centres 105mm x 80mm. fiteed with a 600kg red polyurethane spring but load cpacaity is 300kg at 4kph and 140kg at 10kph. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC

Diameter (mm)	160
Fixing Option	Plate
Castor Type	Swivel
Bearing Type	Ball
Height (mm)	200
Plate Size (mm)	138 x 110
Hole Centres (mm)	105 x 80
To Suit Fixing Bolt (mm)	10
Wheel Material	Rubber on Aluminium
Colour / Shore Hardness	Black Elastic Rubber on Aluminium Rim / 65 Shore A
Temperature Resistance	-30°C to +80°C
Top Plate Thickness (mm)	7.5
Fork Thickness (mm)	6
Swivel Radius (mm)	182
Load Capacity (kg)	300
Tread (mm)	50
Castor Material	Zinc plated