
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Elastic Rubber on Aluminium Plate Swivel Castor Footguard 150mm 350kg load

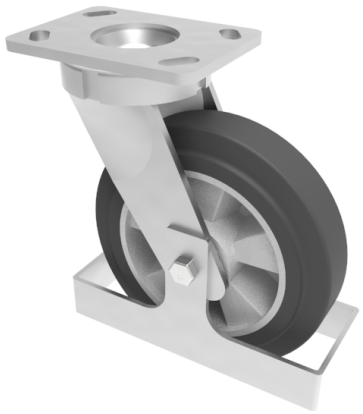

Product code: BZK150ERBJFG

Fabricated swivel castor with a top plate fixing fitted with a black elastic rubber tyred aluminium centred wheel with ball bearings and footguard. Wheel diameter 150mm, tread width 50mm, overall height 200mm, top plate 150mm x 110mm, hole centres 105mm x 80mm or 121mm x 59mm. Load capacity 350kg at 4kph and 140kg at 10kph.

Height (mm)	200
Tread (mm)	50
To Suit Fixing Bolt (mm)	12
Bearing Type	Ball
Diameter (mm)	150
Wheel Material	Rubber on Aluminium
Fixing Option	Plate
Castor Type	Swivel
Load Capacity (kg)	350
Colour / Shore Hardness	Black Elastic Rubber on Aluminium Rim / 65 Shore A
Swivel Radius (mm)	130
Plate Size (mm)	150 x 110
Hole Centres (mm)	105/121 x 80/59
Fork Thickness (mm)	6
Top Plate Thickness (mm)	7.5
Temperature Resistance	-30 ?C TO +80 ?C
Castor Material	Zinc plated