
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Ergonomic Polyurethane Plate Fixed Castor 200mm 1500kg Load

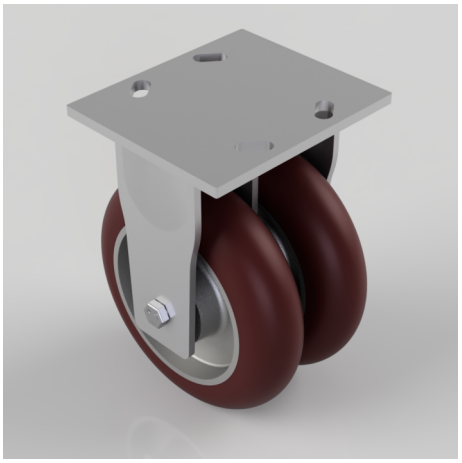

Product code: 2BZKF200RPTABJ

Twin wheeled fabricated fixed castor with a top plate fixing fitted with 2 ergonomic polyurethane tyred aluminium centred wheels with ball bearings. Wheel diameter 2 x 200mm, tread width 2 x 50mm, overall height 250mm, top plate 175mm x 150mm hole centres 105mm x 80mm or 121mm x 59mm. Load capacity 1500kg.

Diameter (mm)	200
Fixing Option	Plate
Castor Type	Fixed
Bearing Type	Ball
Plate Size (mm)	175 x 150
Hole Centres (mm)	105/121 x 80/59
Height (mm)	250
To Suit Fixing Bolt (mm)	12
Wheel Material	Polyurethane on Cast Iron
Colour / Shore Hardness	Brown Ergonomic Polyurethane on Aluminium Rim / 95 Shore A
Temperature Resistance	"-20 ?C TO +80 ?C
Tread (mm)	2 x 50
Load Capacity (kg)	1500
Top Plate Thickness (mm)	8
Fork Thickness (mm)	6
Castor Material	Zinc plated