
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Polyurethane Cast Iron Plate Fixed Castor 250mm 1800kg Load

Product code: BZQFX250PTBJ

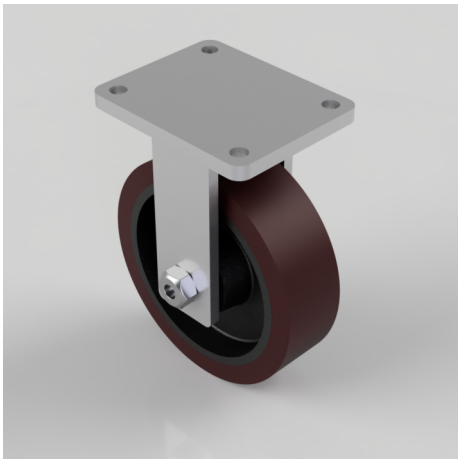

Fabricated fixed castor with a top plate fixing fitted with a brown polyurethane tyre cast iron centred wheel with ball bearings. Wheel diameter 250mm, tread width 75mm, overall height 314mm, top plate 200mm x 160mm, hole centres 160mm x 120mm. Load capacity 1800kg.

Diameter (mm)	250
Fixing Option	Plate
Castor Type	Fixed
Bearing Type	Ball
Height (mm)	314
Plate Size (mm)	200 X 160
Hole Centres (mm)	160 X 120
To Suit Fixing Bolt (mm)	16
Wheel Material	Polyurethane on Cast Iron
Colour / Shore Hardness	Brown Polyurethane on Cast Iron Rim / 94 Shore A
Temperature Resistance	-20°C to +80°C
Top Plate Thickness (mm)	16
Fork Thickness (mm)	10
Load Capacity (kg)	1800
Tread (mm)	75
Castor Material	Zinc plated