
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Polyurethane Nylon Plate Swivel Castor 125mm 200kg Load

Product code: SSMM125NP

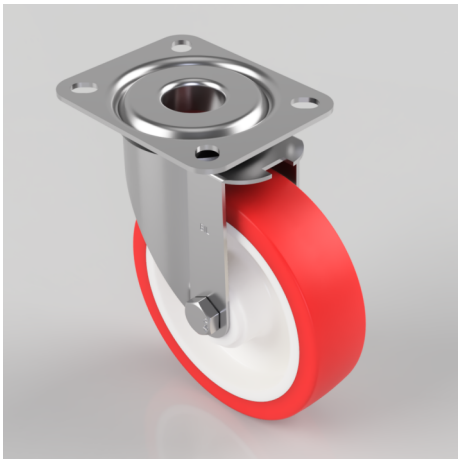

Grade 304 Pressed stainless steel swivel castor with top plate fixing fitted with a red polyurethane tyre white nylon centred wheel with a plain bore. Wheel diameter 125mm, tread width 34mm, overall height 155mm, top plate 105mm x 85mm, hole centres 80mm x 60mm. Load capacity 200kg.

Diameter (mm)	125
Fixing Option	Plate
Castor Type	Swivel
Height (mm)	155
Wheel Material	Polyurethane on Nylon
Colour / Shore Hardness	Red Polyurethane on Nylon Rim / 96 Shore A
Bearing Type	Plain
Tread (mm)	34
Fork Thickness (mm)	2
To Suit Fixing Bolt (mm)	8
Load Capacity (kg)	200
Temperature Resistance	-20°C to +70°C
Plate Size (mm)	105 X 85
Hole Centres (mm)	80 X 60
Top Plate Thickness (mm)	2.5
Swivel Radius (mm)	95
Castor Material	Stainless Steel