
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Polyurethane Nylon Plate Swivel Castor 150mm 400kg Load

Product code: SSMM150NP

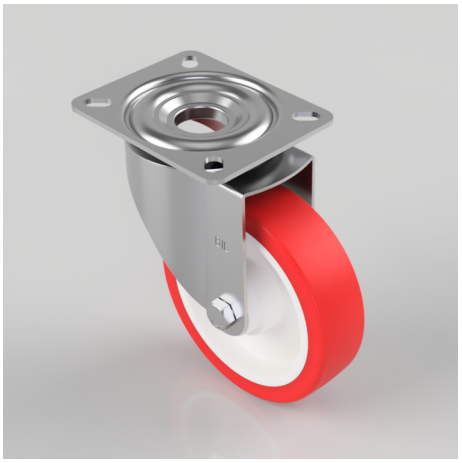

Grade 304 Pressed stainless steel swivel castor with a top plate fixing fitted with a red polyurethane white nylon centred wheel with a plain bore. Wheel diameter 150mm, tread width 40mm, overall height 190mm, top plate 140mm x 110mm, hole centres 105mm x 80mm. Load capacity 400kg.

Diameter (mm)	150
Fixing Option	Plate
Castor Type	Swivel
Height (mm)	190
Wheel Material	Polyurethane on Nylon
Colour / Shore Hardness	Red Polyurethane on Nylon Rim / 96 Shore A
Bearing Type	Plain
Tread (mm)	40
Fork Thickness (mm)	2.5
To Suit Fixing Bolt (mm)	10
Load Capacity (kg)	400
Temperature Resistance	-20 ?C TO +70 ?C
Plate Size (mm)	135 x 110
Hole Centres (mm)	105 x 80
Top Plate Thickness (mm)	3.5
Swivel Radius (mm)	128
Castor Material	Stainless Steel