
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Polyurethane Nylon Plate Swivel Castor Brake 125mm 300kg Load

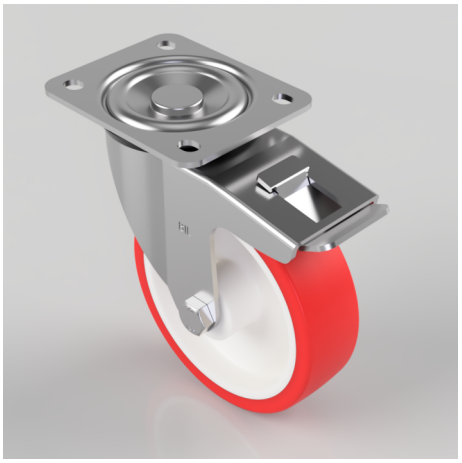

Product code: SSEH125NPBSWB

Grade 304 Pressed stainless steel swivel castor with a top plate fixing fitted with a red polyurethane tyre on white nylon centred wheel with roller bearing and a total lock brake. Wheel diameter 125mm, tread width 36mm, overall height 156mm, top plate 105mm x 86mm, hole centres 80mm x 60mm. Load capacity 300kg

Diameter (mm)	125
Fixing Option	Plate
Castor Type	Swivel with Total Lock Brake
Height (mm)	156
Wheel Material	Polyurethane on Nylon
Colour / Shore Hardness	Red Polyurethane on Nylon Rim / 96 Shore A
Bearing Type	Roller
Tread (mm)	36
Fork Thickness (mm)	3
To Suit Fixing Bolt (mm)	8
Load Capacity (kg)	300
Temperature Resistance	-20°C to +70°C
Plate Size (mm)	105 x 86
Hole Centres (mm)	80 X 60
Top Plate Thickness (mm)	3
Swivel Radius (mm)	115
Castor Material	Stainless Steel