
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Polyurethane Swivel Plate Castor 125mm 300kg

Product code: BZEH125PABJFPSWB

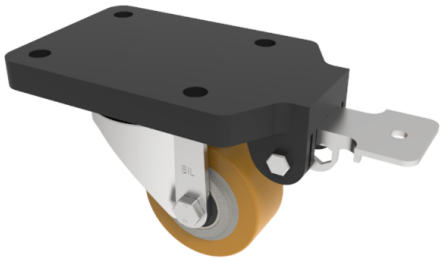

Pressed steel swivel castor with a flat plate fixing fitted with a brown polyurethane tyred on aluminium centred wheel with ball bearing and a fixed position total lock brake. Wheel diameter 125mm, Tread width 40mm, overall height 170mm, top plate 180mm x 115mm,hole centres 105mm x 80mm Load capacity 300kg.

Fixing Option	Plate
Diameter (mm)	125
Load Capacity (kg)	300
Castor Type	Swivel with Fixed Position Total Lock Brake
Height (mm)	170
Wheel Material	Polyurethane on Aluminium
Colour / Shore Hardness	Brown Polyurethane on Aluminium Rim / 93 Shore A
Bearing Type	Ball
Tread (mm)	40
Fork Thickness (mm)	3
Temperature Resistance	-20°C to +70°C
Plate Size (mm)	180 x 115
Hole Centres (mm)	105 x 80
Swivel Radius (mm)	164
Top Plate Thickness (mm)	18
To Suit Fixing Bolt (mm)	10
Castor Material	Zinc plated