


Vulkollan Polyurethane Driven Wheel 250mm 1585Kg Load

Product code: VULW250-70-80-KM35

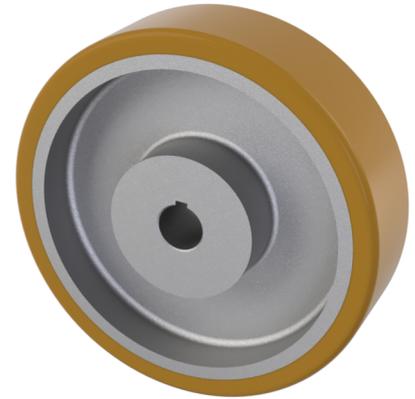

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a keyway. Diameter 250mm, Tread Width 70mm, Hub Width 80mm, Hub Diameter 95mm, Keyway Bore 35mm, Load Capacity 1585kg. PLEASE NOTE Keyway Bore SIZE TOLERANCES ARE BASED ON H7 (0 +0.025)
 DIN6885 ISO 286-2 STANDARD

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	250
Hub Width (mm)	80
Bore Size (mm)	35
Tread (mm)	70
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Keywayed
Hub Diameter (mm)	95
Load Capacity (kg)	1585

BIL GROUP LTD

Porte Marsh Road, Calne, Wiltshire, SN11 9BW

Registered in England No: 2603821

VAT Reg: GB572705729

