
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Vulkollan Polyurethane Driven Wheel 350mm 2700Kg Load

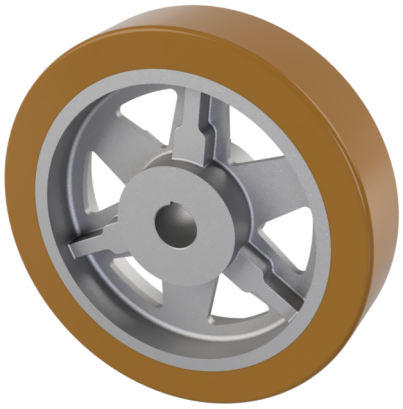

Product code: VULW350-100-100-KM40

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a keyway. Diameter 350mm, Tread Width 100mm, Hub Width 100mm, Hub Diameter 116mm, Keyway Bore 40mm, Load Capacity 2700kg. PLEASE NOTE Keyway Bore SIZE TOLERANCES ARE BASED ON H7 (0 +0.025) DIN6885 ISO 286-2 STANDARD

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	350
Hub Width (mm)	100
Bore Size (mm)	40
Tread (mm)	100
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Keywayed
Hub Diameter (mm)	116
Load Capacity (kg)	2700