
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

# Vulkollan Polyurethane Driven Wheel 350mm 2700Kg Load

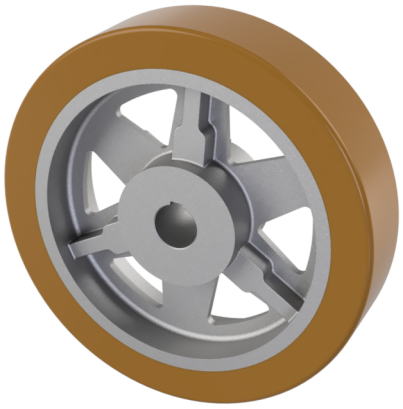

**Product code: VULW350-100-100-KM60**

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a keyway. Diameter 350mm, Tread Width 100mm, Hub Width 100mm, Hub Diameter 116mm, Keyway Bore 60mm, Load Capacity 2700kg. PLEASE NOTE Keyway Bore SIZE TOLERANCES ARE BASED ON H7 ( 0 +0.030 ) DIN6885 ISO 286-2 STANDARD

| | |
|---|---|
| Wheel Material | Polyurethane on Cast Iron |
| Diameter (mm) | 350 |
| Hub Width (mm) | 100 |
| Bore Size (mm) | 60 |
| Tread (mm) | 100 |
| Colour / Shore Hardness | Vulkollan Polyurethane on Cast Iron / 90 Shore A |
| Temperature Resistance | -20 °C TO +80 °C |
| Bearing Type | Keywayed |
| Hub Diameter (mm) | 116 |
| Load Capacity (kg) | 2700 |