


Vulkollan Polyurethane Driven Wheel 400mm 4000Kg Load

Product code: VULW400-125-125-KM50

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a keyway. Diameter 400mm, Tread Width 125mm, Hub Width 125mm, Hub Diameter 115mm, Keyway Bore 50mm, Load Capacity 4000kg. PLEASE NOTE Keyway Bore SIZE TOLERANCES ARE BASED ON H7 (0 +0.025) DIN6885 ISO 286-2 STANDARD

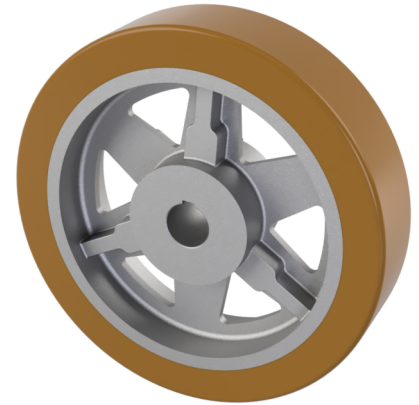

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	400
Hub Width (mm)	125
Bore Size (mm)	50
Tread (mm)	125
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Keywayed
Hub Diameter (mm)	115
Load Capacity (kg)	4000

BIL GROUP LTD

Porte Marsh Road, Calne, Wiltshire, SN11 9BW

Registered in England No: 2603821

VAT Reg: GB572705729

