
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Vulkollan Polyurethane Pilot Bore Wheel 300mm 1240Kg Load

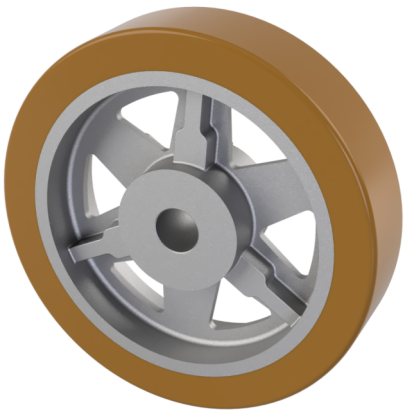

Product code: VULW300-50-60-PBM50

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a pilot bore. Diameter 300mm, Tread Width 50mm, Hub Width 60mm, Hub Diameter 90mm, Bore 50mm, Load Capacity 1240kg. PLEASE NOTE BORE SIZE TOLERANCES ARE BASED ON H7 (0 +0.025) DIN6885 ISO 286-2 STANDARD

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	300
Hub Width (mm)	60
Bore Size (mm)	50
Tread (mm)	50
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Plain
Hub Diameter (mm)	90
Load Capacity (kg)	1240