
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Vulkollan Polyurethane Pilot Bore Wheel 300mm 2500Kg Load

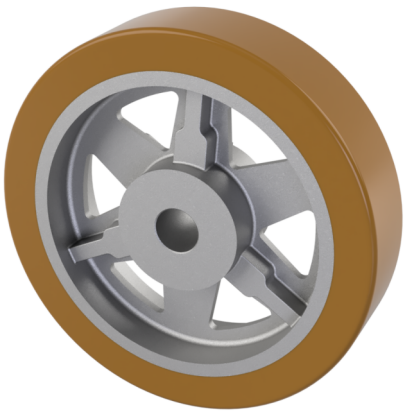

Product code: VULW300-100-100-PBM60

Vulkollan polyurethane tyre on a colturiet painted cast iron centred wheel with a pilot bore. Diameter 300mm, Tread Width 100mm, Hub Width 100mm, Hub Diameter 102mm, Bore 60mm, Load Capacity 2500kg. PLEASE NOTE BORE SIZE TOLERANCES ARE BASED ON H7 (0 +0.030) DIN6885 ISO 286-2 STANDARD

Wheel Material	Polyurethane on Cast Iron
Diameter (mm)	300
Hub Width (mm)	100
Bore Size (mm)	60
Tread (mm)	100
Colour / Shore Hardness	Vulkollan Polyurethane on Cast Iron / 90 Shore A
Temperature Resistance	-20 °C TO +80 °C
Bearing Type	Plain
Hub Diameter (mm)	102
Load Capacity (kg)	2500