

DRAWING DISCLAIMER


COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.








125mm diameter, 40mm tread width,black high ergonomic elastic natural 55 shore A round profile rubber tyre on aluminium centre wheel with ball journal bearings. Bore size 15mm, hub length 40mm. Load capacity 200kg. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC, also available with flat tread details on request

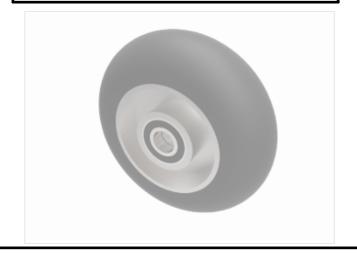

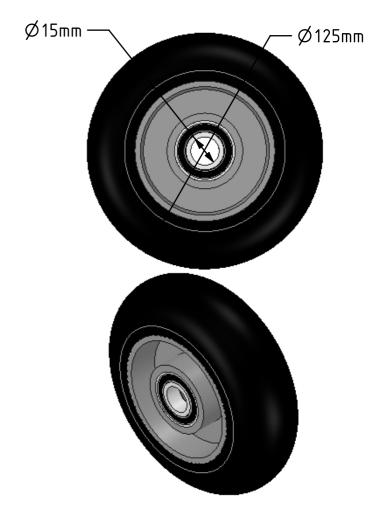

	NAME	DATE
DRAWN	Matt	25/09/17
APPROVED BY	Chris	25/09/17
SCALE	1:2	25/09/17
WEIGHT	0.582ka	25/09/17

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES

Unspecified Tolerances Machining ± 0.25mm Fabrication ± 1mm



BIL Group Ltd, Porte Marsh Road, Calne Wiltshire, SN11 9BW, United Kingdom Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300 www.bilgroup.co.uk

REV

TITLE

BZH125WSRERBJM15

SIZE	DWG NO.		Г
A4	BILCW01BZH125WSRERBJM15_	_01	

FILE NAME BILCW01BZH125WSRERBJM15__01.PDF SHEET 1 OF 1