
DRAWING DISCLAIMER


COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.






Fabricated swivel castor with top plate fixing fitted with a 200mm x 50mm black high elastic natural 65 shore A rubber tyred aluminium centred wheel with ball bearings overall height 237mm/257mm, plate size 138mm x 110mm, hole centres 105mm x 80mm. fitted with a 600kg red polyurethane spring but load capacity is 500kg at 4kph and 180kg at 10kph. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC

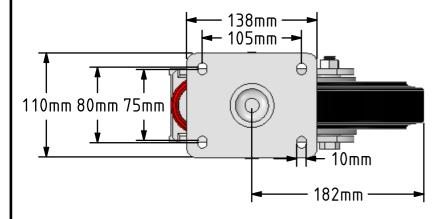



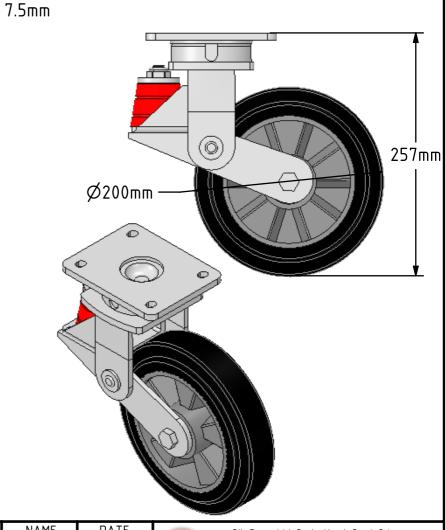

	NAME	DATE
DRAWN	Matt	08/05/18
APPROVED BY	$Tim\ W$	08/05/18
SCALE	1:4	08/05/18
WEIGHT	5.837kg	08/05/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES

Unspecified Tolerances Machining ± 0.25mm Fabrication ± 1mm



BIL Group Ltd, Porte Marsh Road, Calne Wiltshire, SN11 9BW, United Kingdom Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300 www.bilgroup.co.uk

SHEET 1 OF 1

TITLE

BZKL200ERBJSPR

	·	
SIZE	DWG NO.	REV
Α4	BILCW03BZKL200ERBJSPR02	2

FILE NAME BILCW03BZKL200ERBJSPR__02.PDF