
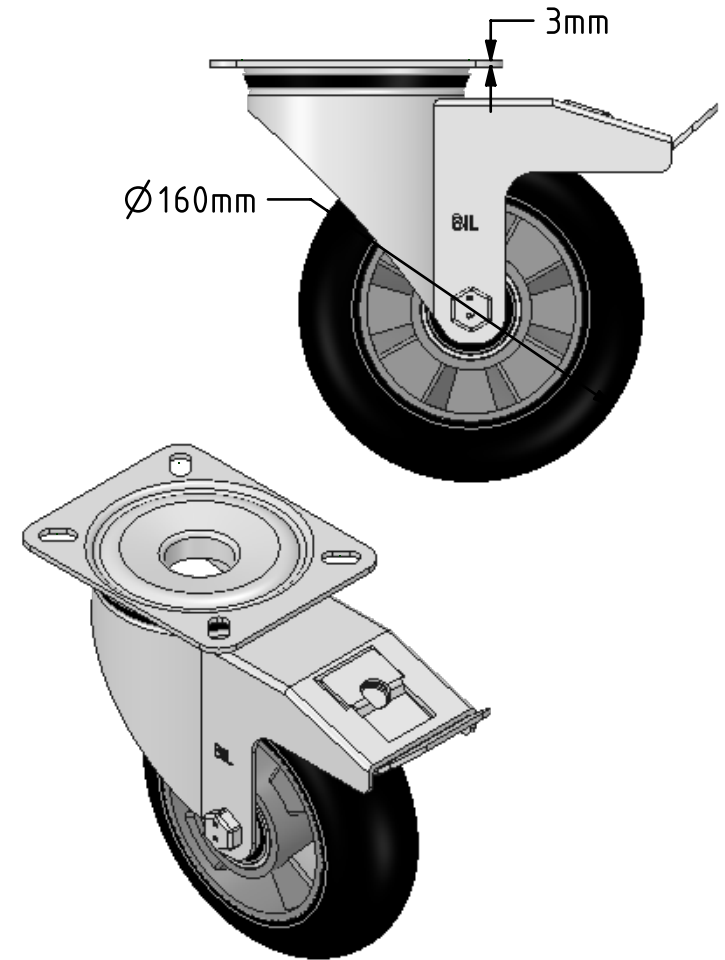
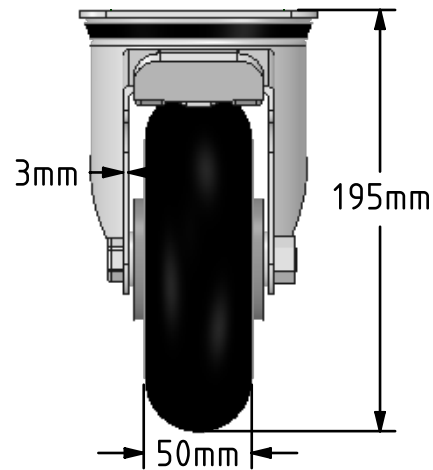


DRAWING DISCLAIMER

COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.

**Description:**
BZMM160SRERBJSWB

Pressed steel swivel castor with a top plate fixing fitted with a ergonomic black high elastic natural 55 shore A round profile tyre aluminium centred wheel with a ball journal bearings and total lock brake. Wheel diameter 160mm, tread width 50mm, overall height 195mm, top plate 135mm x 110mm, hole centres 105mm x 80mm. Load capacity 300kg. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC also available with flat tread details on request

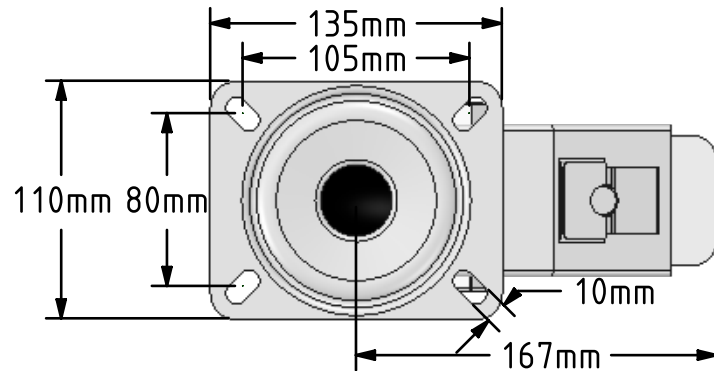

	NAME	DATE
DRAWN	Matt	08/08/18
APPROVED BY	Tim W	08/08/18
SCALE	2:1	08/08/18
WEIGHT	2.79kg	08/08/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES

Unspecified Tolerances
Machining $\pm 0.25\text{mm}$
Fabrication $\pm 1\text{mm}$



BIL Group Ltd, Porte Marsh Road, Calne
Wiltshire, SN11 9BW, United Kingdom
Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300
www.bilgroup.co.uk

TITLE

BZMM160SRERBJSWB

SIZE

DWG NO.

A4

BILCW03BZMM160SRERBJSWB_01

REV

1

FILE NAME BILCW03BZMM160SRERBJSWB_01.PDF SHEET 1 OF 1