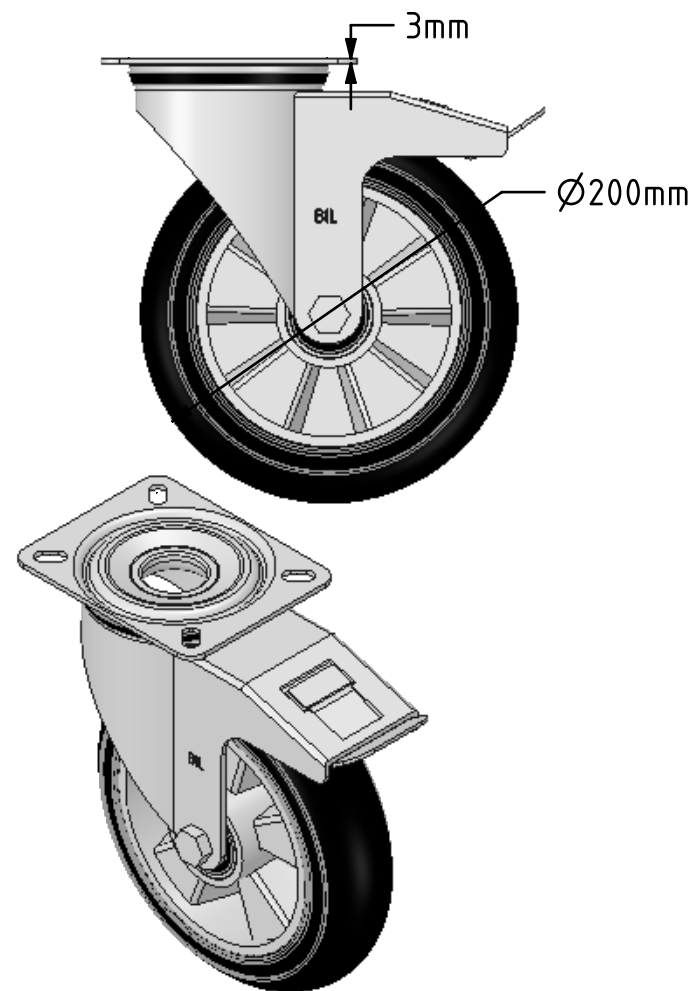
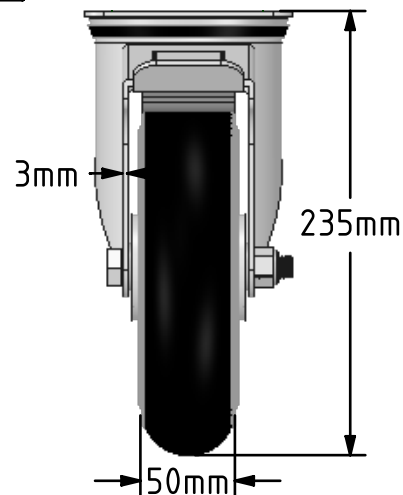
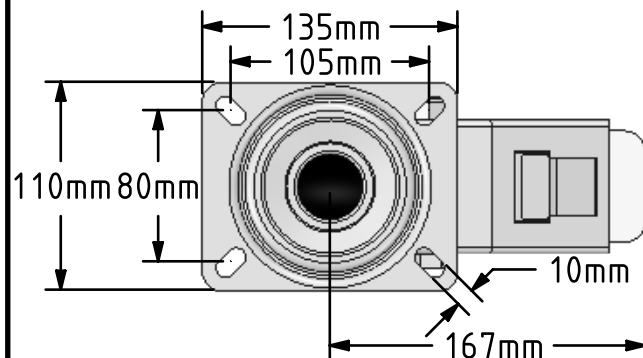


**DRAWING DISCLAIMER**

COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.

**Description:**

BZMM200SRERBJSWB

Pressed steel swivel castor with a top plate fixing fitted with an ergonomic black high elastic natural 55 shore A round profile rubber tyred aluminium centred wheel with a ball journal bearings and total lock brake. Wheel diameter 200mm, tread width 50mm, overall height 235mm, top plate 135mm x 110mm, hole centres 105mm x 80mm. Load capacity 400kg. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC, also available with flat tread details on request



	NAME	DATE
DRAWN	Matt	18/01/18
APPROVED BY	Chris	18/01/18
SCALE	1:4	18/01/18
WEIGHT	3.219kg	18/01/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES

Unspecified Tolerances  
Machining  $\pm 0.25\text{mm}$   
Fabrication  $\pm 1\text{mm}$



BIL Group Ltd, Porte Marsh Road, Calne  
Wiltshire, SN11 9BW, United Kingdom  
Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300  
www.bilgroup.co.uk

TITLE

BZMM200SRERBJSWB

SIZE

DWG NO.

A4

BILCW03BZMM200SRERBJSWB\_01

REV

1

FILE NAME BILCW03BZMM200SRERBJSWB\_01.PDF SHEET 1 OF 1