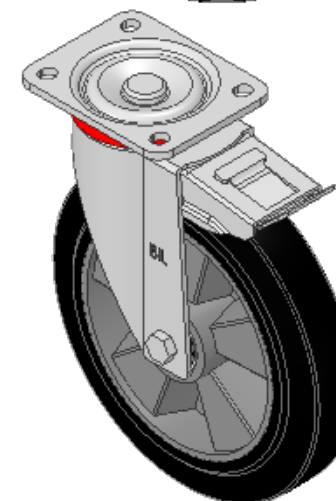
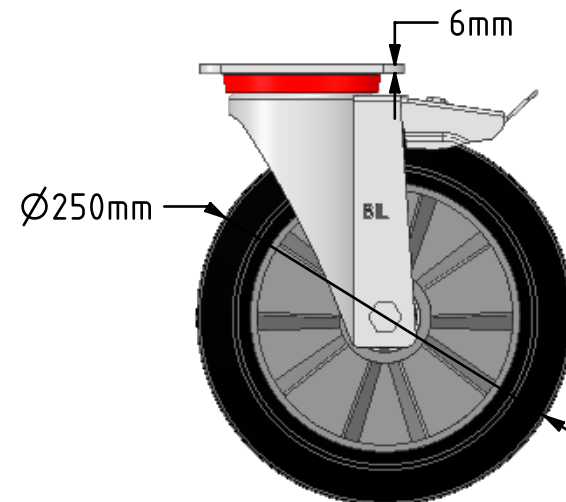
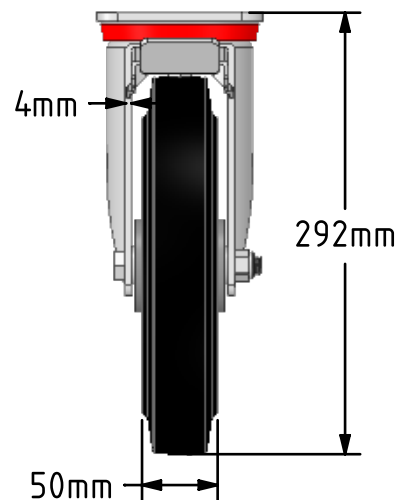
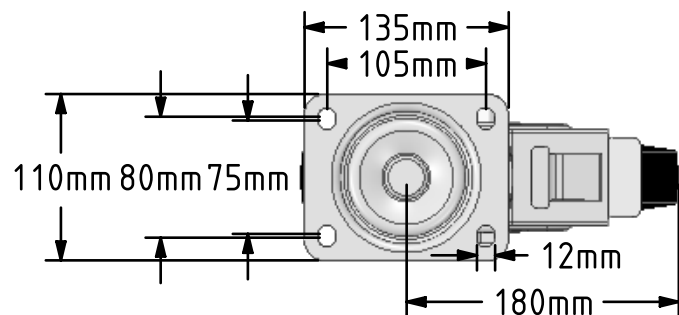


DRAWING DISCLAIMER


COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.

**Description:**

BZP250ERBJSWB

Pressed steel swivel castor with a flat plate fixing fitted with a black high elastic natural 65 shore A rubber tyre on aluminium centred wheel with a ball bearing and total lock brake. Wheel diameter 250mm, tread width 50mm, overall height 292mm, plate size 135mm x 110mm, hole centres 105mm x 80/75mm. Load capacity 650kg. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC



	NAME	DATE	 BIL Group Ltd, Porte Marsh Road, Calne Wiltshire, SN11 9BW, United Kingdom Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300 www.bilgroup.co.uk		
DRAWN	Matt	31/01/19			
APPROVED BY	Chris	31/01/19	TITLE BZP250ERBJSWB		
SCALE	1:5	31/01/19			
WEIGHT	4.842kg	31/01/19	SIZE DWG NO. A4 BILCW03BZP250ERBJSWB__01		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES					REV 1
Unspecified Tolerances Machining ± 0.25mm Fabrication ± 1mm			FILE NAME BILCW03BZP250ERBJSWB__01.PDF SHEET 1 OF 1		