
DRAWING DISCLAIMER


COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.






Pressed steel swivel castor with a top plate fixing fitted with a black high elastic natural 65 shore A rubber tyre on an aluminium centred wheel with a ball bearings. Wheel diameter 160mm, tread width 50mm, overall height 195mm, top plate 135mm x 110mm, hole centres 105mm x 80/75mm. Load capacity 350kg. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC

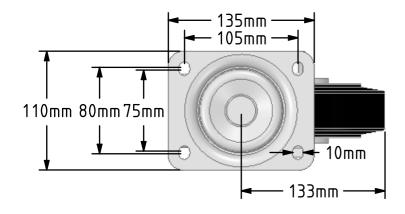



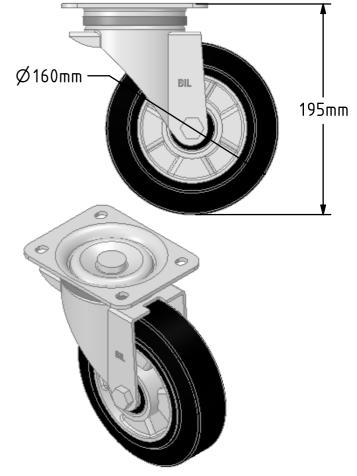

	NAME	DATE
DRAWN	Matt	14/09/18
APPROVED BY	Chris	14/09/18
SCALE	2:7	14/09/18
WEIGHT	2.531kg	14/09/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES

Unspecified Tolerances Machining ± 0.25mm Fabrication ± 1mm



BIL Group Ltd, Porte Marsh Road, Calne Wiltshire, SN11 9BW, United Kingdom Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300 www.bilgroup.co.uk

TITLE

BZWB160ERBJ

SIZE DWG NO.
A4 BILCW03BZWB160ERBJ__01 1

FILE NAME BILCW03BZWB160ERBJ__01.PDF

SHEET 1 OF 1