

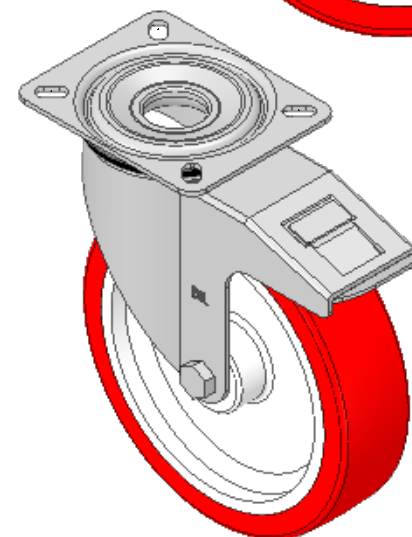
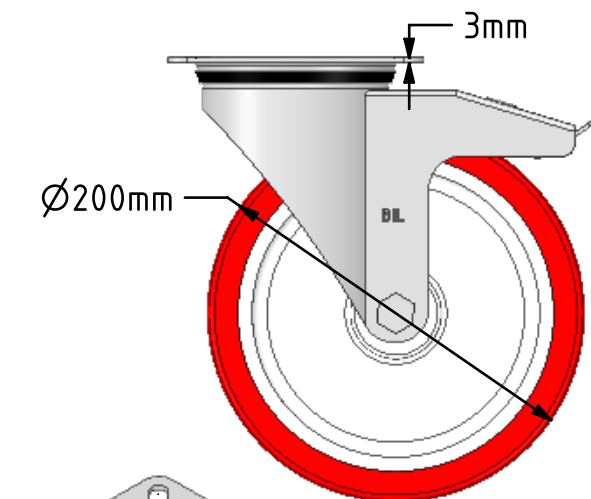


DRAWING DISCLAIMER
 COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.

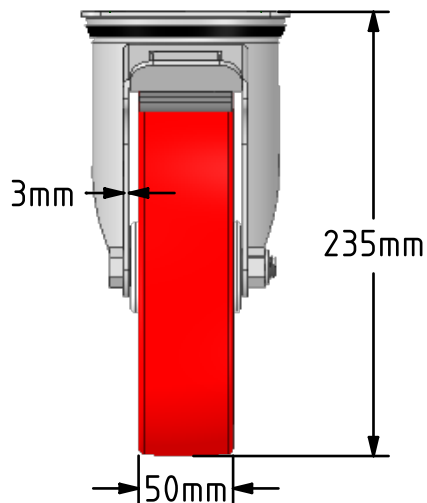

Description:
 SSMM200NPBSWB

Grade 304 Pressed stainless steel swivel castor with a top plate fitted with a red polyurethane tyre on white nylon centred wheel with roller bearings and a total lock brake, 200mm wheel diameter, 50mm tread width, 235mm overall height, 135mm x 110mm top plate, 105 x 80mm bolt holes, with a load capacity of 400kgs.

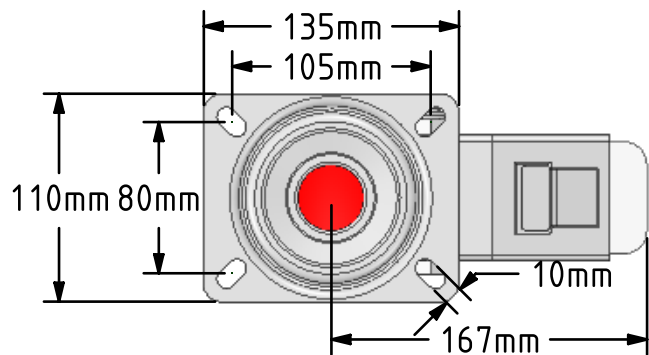

	NAME	DATE
DRAWN	Matt	06/03/19
APPROVED BY	Tim W	06/03/19
SCALE	1:4	06/03/19
WEIGHT	2.78kg	06/03/19

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES

Unspecified Tolerances
 Machining ± 0.25mm
 Fabrication ± 1mm



BIL Group Ltd, Porte Marsh Road, Calne
 Wiltshire, SN11 9BW, United Kingdom
 Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300
 www.bilgroup.co.uk

TITLE

SSMM200NPBSWB

SIZE	DWG NO.	REV
A4	BILCW03SSMM200NPBSWB_02	2

FILE NAME BILCW03SSMM200NPBSWB_02.PDF SHEET 1 OF 1