

Vulkollan® drive wheels • Press on bands • Machined axles • Bespoke castors


SPECIALIST WHEEL SYSTEMS



BIL GROUP LIMITED

☎ +44 (0)1249 822 222

 wheelsystems@bilgroup.co.uk

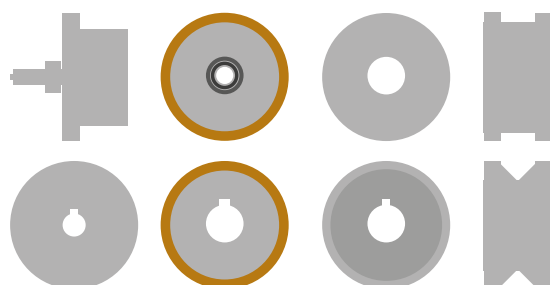



One of The UK's Leading Specialist Wheel Manufacturers

BIL Castors & Wheels is part of a larger group of companies known as BIL Group Limited and it can trace its origins back to 1972.

Using our extensive market knowledge, BIL castors & wheels have know-how and expertise to produce bespoke wheel system solutions for every industry including the water treatment sector, mining industry, trommel manufacturers, bridge manufacturers and heavy duty industry.


Based in Wiltshire, our in-house manufacturing capability utilises high end equipment, skilled labour and in-house design.




Your quality expectations mean everything to us. Only by striving to exceed these expectations can we hope to retain your custom and therefore allow us to grow. Our ISO 9001:2015 Quality Management system forms the backbone of our organisation.



Focus on innovation flows through our organisation and is the key to our success. As well as improving existing products and designing new solutions for our clients, it also helps us to drive forward our service and to make our system processes more efficient.

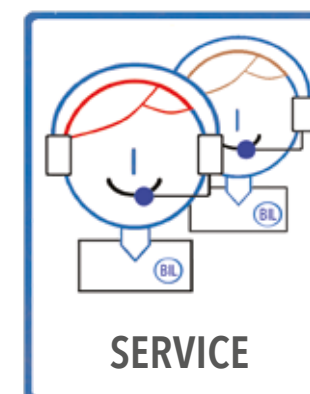

Providing excellent customer service that meets customer expectations is a core business driver at BIL. Our customer service centre utilises the latest software to effectively monitor the levels of service. We offer a local service on a national scale via our team of highly experienced area sales managers. Our products are engineered to provide many years of service.

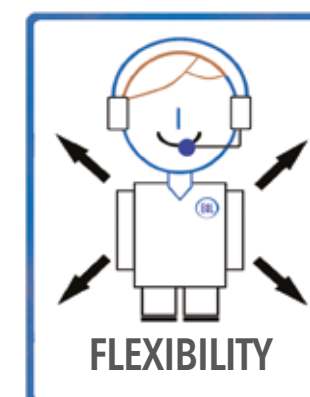

To accommodate the needs of our clients, we accept that we must be flexible in our approach and in everything that we do. In response to shifting demands, we must be able to react quickly and provide the most effective response. Whilst showing a willingness to change should a customer require a bespoke solution.

Machined Nylon Wheels & guide rollers Page 6 to 7



High-quality machined Nylon wheels manufactured from cast nylon (PA6).

- Very high load capacity
- Wear-resistant and non-marking
- Hygienic
- Super low starting and rolling resistance
- Ball Bearing, Plain Bore or Key-way options

Temperature range -30°C to +80°C

Vulkollan® Wheels, Press on Bands & guide rollers Page 14 to 16



Vulkollan® 92 Shore A Cast polyurethane specifically designed for driven and hard wearing applications.

- Very high tensile strength
- Superior tear resistance, insensitive to cut damage
- Resistant to deformation
- Resistant to oils, fats and many chemicals
- Ball Bearing, Plain Bore or Key-way options

Temperature range -40°C to +85°C

Machined Steel Wheels Page 8



Precision machined steel wheel produced from C45 grade steel billets.

- Very high load capacity
- Wear-resistant and shock-resistant
- Excellent lateral peak load resistance
- Super low starting and rolling resistance
- Ball Bearing, Plain Bore or Key-way options

Temperature range -30°C to +120°C

Axles & Machined Components Page 17



Bespoke manufactured axles and machined components designed to precisely fit our wheel systems.

- No more issues with incorrectly sized components
- Manufactured to order
- Available in C45 steel or stainless steel
- Complete wheel systems.

Temperature range -40°C to +85°C

Flanged, V Grooved wheels and rail sections Page 10 to 13




Options include either cast Iron, machined steel or machined nylon.

- Single, Double flanged & V Groove options
- Very high load capacity
- Wear-resistant and shock-resistant
- Flat or taper tread
- Super low starting and rolling resistance
- Ball Bearing, Plain Bore or Key-way options

Temperature range -30°C to +120°C

Heavy Duty Castors Page 18 to 19

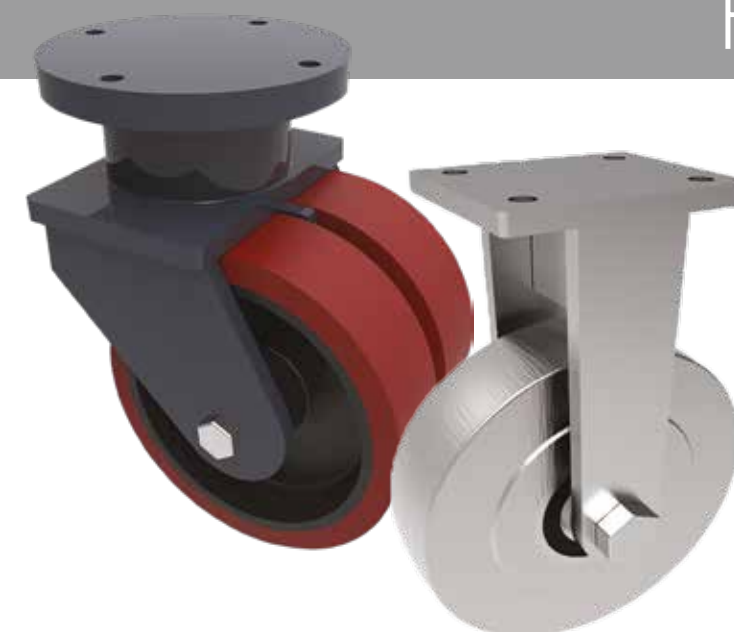

As well as our off the shelf product lines, we can offer a bespoke manufactured castor to suit your specific requirement.

- Made to any size
- Flexible solutions
- Loads up to 20,000kg
- On-site support available

Telephone +44 (0)1249 822 222 www.bilgroup.co.uk

POM (Polyacetal) guide rollers


25 to 80 mm


20 to 220 kg



Technical Specification

80 Shore D with ball bearings
(ZZ or 2RS).
Temperature range -40°C to +80°C

Characteristics

Wear-resistant, non-marking, hygienic,
low rolling resistance, chemical resistant to
oils, greases, fuels and many chemicals

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Product Code
25	13	6	6	20	PR25136
30	14	8	7	30	PR30148
30	14	9	7	22	PR30149
32	16	8	7	44	PR32168
35	14	8	7	40	PR35148
40	16	10	9	70	PR401610
40	16	12	8	70	PR401612
40	20	10	9	90	PR402010
44	16	12	8	80	PR441612
50	15	8	7	80	PR50158
50	15	10	9	100	PR501510
50	18	12	10	100	PR501812
50	18	15	11	110	PR501815
50	18	17	10	110	PR501817
50	25	12	10	125	PR502512
60	20	17	12	150	PR602017
60	25	15	11	150	PR602515
65	25	20	14	150	PR652520
70	25	20	14	200	PR702520
75	22	17	14	160	PR752217
75	22	20	14	160	PR752220
80	22	17	14	175	PR802217
80	25	25	15	220	PR802525

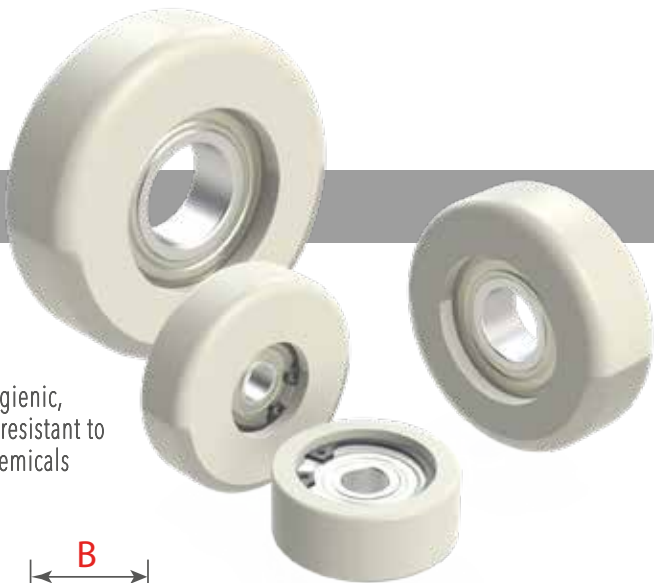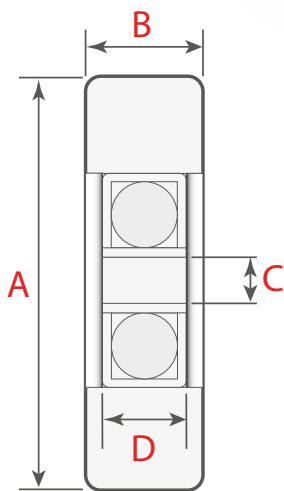

COMPLETE WHEEL SYSTEMS

+44 (0)1249 822 222
wheelsystems@bilgroup.co.uk

NYLON (PA6) machined wheels


65 to 400 mm


800 to 12,000 kg


Technical Specification

High Quality Cast and Machined Nylon
Temperature range -30°C to +80°C

Characteristics

Very high load capacity, wear-resistant,
non-marking, hygienic, Super low rolling
resistance

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Product Code
65	45	15	45	800	BZXH65WNYBJM15HD
80	45	20	48	1,000	BZH80WNYBJM20HD
100	45	20	48	1,250	BZH100WNYBJM20HD
100	45	25	48	1,250	BZH100WNYBJM25HD
125	45	20	48	1,400	BZH125WNYBJM20HD
125	45	25	48	1,400	BZH125WNYBJM25HD
125	55	20	60	2,000	BZXH125WNYBJM20HD
125	55	25	60	2,000	BZXH125WNYBJM25HD
150	50	25	60	1,500	BZXH150WNYBJM25HD
150	55	30	60	2,500	BZXH150WNYBJM30HD
150	80	35	85	3,000	BZXXH150WNYBJM35HD
200	50	20	60	1,500	BZXH200WNYBJM20HD
200	50	25	60	1,500	BZXH200WNYBJM25HD
200	55	35	60	3,000	BZXXH200WNYBJM35HD
200	55	40	60	3,000	BZXH200WNYBJM40HD
200	80	50	85	4,500	BZXH200WNYBJM50HD
300	80	55	85	7,000	BZXH300WNYBJM55HD
300	110	70	120	10,000	BZXXH300WNYBJM70HD
400	110	80	120	12,000	BZXXH400WNYBJM80HD

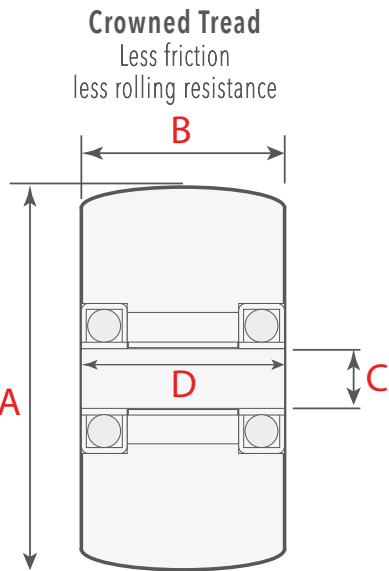


Flat tread available
on request.



Bespoke POM (Polyacetal) and NYLON (PA6) wheels made to order

Designed to your specification

We have the capability to manufacture to your specific requirements.....
.....tailor-made bespoke solutions
Full CAD capabilities

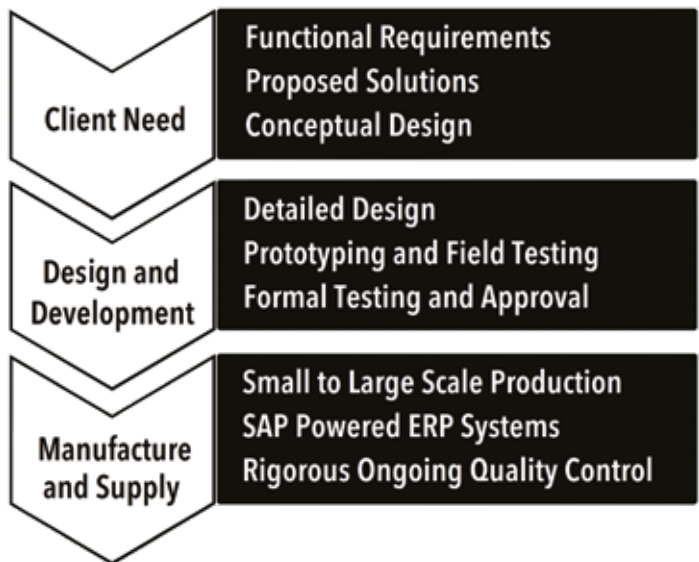

STEEL (C45) machined wheels


65 to 300 mm


750 to 15,400 kg

Technical Specification

High Quality C45 Machined Steel
Temperature range -30°C to +120°C

Characteristics

Very high load capacity, wear-resistant,
shock-resistant, excellent resistance to lateral
peak loads, super low rolling resistance

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Bore	Tread Type	Product Code
65	40	20	45	750	Ball Bearing	Crowned	BZH65WMSTBJM20
80	40	20	45	1,100	Ball Bearing	Crowned	BZH80WMSTBJM20
100	40	25	45	1,700	Ball Bearing	Crowned	BZH100WMSTBJM25
100	55	25	60	2,500	Ball Bearing	Crowned	BZXH100WMSTBJM25
125	55	30	60	2,750	Ball Bearing	Crowned	BZH125WMSTBJM30
150	50	25	50	1,200	Ball Bearing	Crowned	BZH150WMSTBJM25
150	55	35	60	3,600	Ball Bearing	Crowned	BZH150WMSTBJM35
200	55	35	60	3,600	Ball Bearing	Crowned	BZXH200WMSTBJM35
200	55	50	60	6,000	Ball Bearing	Crowned	BZXH200WMSTBJM50
200	80	50	90	7,000	Ball Bearing	Crowned	BZXXH200WMSTBJM50
250	55	35	60	3,600	Ball Bearing	Crowned	BZXH250WMSTBJM35
250	55	50	60	6,000	Ball Bearing	Crowned	BZXH250WMSTBJM50
250	80	50	90	7,000	Ball Bearing	Crowned	BZXXH250WMSTBJM50
300	55	50	60	6,000	Ball Bearing	Crowned	BZXH300WMSTBJM50
300	80	55	90	7,500	Ball Bearing	Crowned	BZXXH300WMSTBJM55

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Bore	Tread Type	Product Code
75	60	25	60	1,140	Ball Bearing	Flat	75RWMSFTBJM25
75	60	30	60	2,040	Ball Bearing	Flat	75RWMSFTBJM30
100	60	25	60	1,140	Ball Bearing	Flat	100RWMSFTBJM25
100	60	30	60	2,040	Ball Bearing	Flat	100RWMSFTBJM30
150	80	30	80	2,040	Ball Bearing	Flat	150RWMSFTBJM30
150	80	35	80	2,800	Ball Bearing	Flat	150RWMSFTBJM35
150	80	40	80	3,384	Ball Bearing	Flat	150RWMSFTBJM40
200	90	40	90	3,384	Ball Bearing	Flat	200RWMSFTBJM40
200	90	50	90	7,340	Ball Bearing	Flat	200RWMSFTBJM50
250	100	50	100	7,340	Ball Bearing	Flat	250RWMSFTBJM50
250	100	60	100	9,000	Ball Bearing	Flat	250RWMSFTBJM60
250	100	75	100	9,785	Ball Bearing	Flat	250RWMSFTBJM75
300	100	50	100	7,340	Ball Bearing	Flat	300RWMSFTBJM50
300	100	60	100	9,000	Ball Bearing	Flat	300RWMSFTBJM60
300	100	75	100	9,785	Ball Bearing	Flat	300RWMSFTBJM75


A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Bore	Tread Type	Product Code
75	60	25	60	2,300	Keywayed	Flat	75RWMSFTBKM25
75	60	30	60	2,300	Keywayed	Flat	75RWMSFTBKM30
100	60	25	60	3,100	Keywayed	Flat	100RWMSFTBKM25
100	60	30	60	3,100	Keywayed	Flat	100RWMSFTBKM30
150	80	30	80	6,200	Keywayed	Flat	150RWMSFTBKM30
150	80	35	80	6,200	Keywayed	Flat	150RWMSFTBKM35
150	80	40	80	6,200	Keywayed	Flat	150RWMSFTBKM40
200	90	40	90	9,300	Keywayed	Flat	200RWMSFTBKM40
200	90	50	90	9,300	Keywayed	Flat	200RWMSFTBKM50
250	100	50	100	12,900	Keywayed	Flat	250RWMSFTBKM50
250	100	60	100	12,900	Keywayed	Flat	250RWMSFTBKM60
250	100	75	100	12,900	Keywayed	Flat	250RWMSFTBKM75
300	100	50	100	15,400	Keywayed	Flat	300RWMSFTBKM50
300	100	60	100	15,400	Keywayed	Flat	300RWMSFTBKM60
300	100	75	100	15,400	Keywayed	Flat	300RWMSFTBKM75

Cannot find what you are looking for?



.....Please contact us today as there are many other sizes and specifications available off the shelf, and made to order!




Crowned Tread
Less friction
less rolling resistance

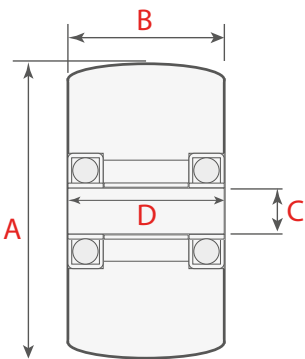

Flat Tread
Larger surface area
for use with rail section

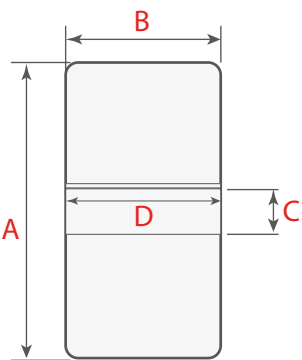

Example
Keywayed
Wheel



Keywayed
Refer to the chart below

Wheel Bore Size (mm)	A Keyway Width (mm)	B Keyway Height (mm)
12	4	1.8
20	6	2.8
25	8	3.3
30	8	3.3
35	10	3.3
40	12	3.3
50	14	3.8
60	18	4.4
75	20	4.9

COMPLETE WHEEL SYSTEMS

+44 (0)1249 822 222
wheelsystems@bilgroup.co.uk

Specialist wheels and axles.....the complete wheel system

Machined to your exacting requirements.....the complete solution without the risk of non-compatible parts

Steel, Stainless Steel, Aluminium or brass....the possibilities are endless!
Precision manufacturing to ensure both wheel and axle fit perfectly...the one stop shop!



Single Flanged NYLON (PA6) machined wheels

🌀 50 to 250 mm **KG** 220 to 3,000 kg


Technical Specification

High Quality Cast and Machined Nylon
 Temperature range -30°C to +80°C

Characteristics

Wear-resistant, non-marking, hygienic,
 low rolling resistance, chemical resistant to
 oils, greases, fuels and many chemicals

A Tread Diameter (mm)	B OD of Flange (mm)	C Flange Width (mm)	D Total Tread Width (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Product Code
50	62	26	32	32	15	220	BZH50WNYSFBJM15
75	100	30	40	47	20	380	BZH75WNYSFBJM20
100	125	36	46	52	20	600	BZH100WNYSFBJM20
125	145	36	46	52	20	750	BZH125WNYSFBJM20
150	175	36	46	52	20	900	BZH150WNYSFBJM20
180	210	36	48	52	20	1,000	BZH180WNYSFBJM20
200	230	38	53	60	25	1,300	BZH200WNYSFBJM25
200	230	65	80	90	40	2,500	BZH200WNYSFBJM40
250	300	50	65	70	30	2,100	BZH250WNYSFBJM30
250	300	60	80	90	40	3,000	BZH250WNYSFBJM40

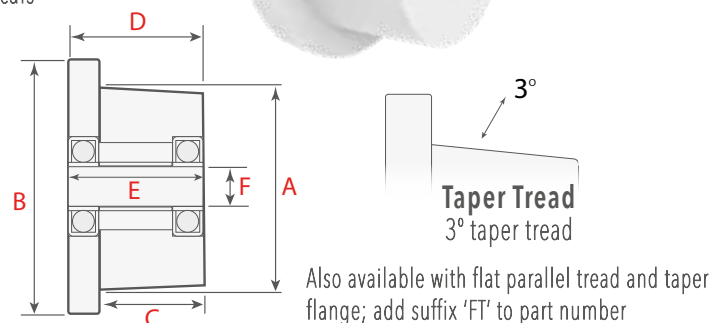

Double Flanged NYLON (PA6) machined wheels

🌀 200 to 400 mm **KG** 1,140 to 4,729 kg

Technical Specification


High Quality Cast and Machined Nylon
 Temperature range -30°C to +80°C

Characteristics

Wear-resistant, non-marking, hygienic,
 low rolling resistance, chemical resistant to
 oils, greases, fuels and many chemicals

A Tread Diameter (mm)	B OD of Flange (mm)	C Flange Width (mm)	D Total Tread Width (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Product Code
200	240	60	100	100	25	1,140	200WNYDFBJM25
250	295	60	100	100	30	2,040	250WNYDFBJM30
300	345	60	100	100	40	3,384	300WNYDFBJM40
350	395	60	110	110	50	4,100	350WNYDFBJM50
400	450	60	110	110	50	4,729	400WNYDFBJM50

Plain bore versions are available on request



V groove NYLON (PA6) machined wheels

🌀 50 to 200 mm **KG** 50 to 500 kg


Technical Specification

High Quality Cast and Machined Nylon
 Temperature range -30°C to +80°C

Characteristics

Wear-resistant, non-marking, hygienic,
 low rolling resistance, chemical resistant to
 oils, greases, fuels and many chemicals

A Tread Diameter (mm)	B Total Tread Width (mm)	C Groove Width (mm)	D Groove Depth (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Product Code
50	18	12	7	18	10	50	BZH50WNYVBJM10
75	22	16	8	22	12	75	BZH75WNYVBJM12
100	24	18	9	24	15	150	BZH100WNYVBJM15
100	40	20	9	40	15	400	BZXH100WNYVBJM15
120	33	25	11	33	20	200	BZH120WNYVBJM20
125	50	25	11	50	20	700	BZH125WNYVBJM20
150	33	25	11	33	20	400	BZH150WNYVBJM20
200	33	25	11	33	20	500	BZH200WNYVBJM20



Cannot find what you are looking for?

.....Please contact us today as there are many other sizes and specifications available off the shelf, and made to order!

COMPLETE WHEEL SYSTEMS

+44 (0)1249 822 222

wheelsystems@bilgroup.co.uk

Single Flanged 'I' beam STEEL (C45) machined wheels


🌀 55 to 200 mm **KG** 160 to 2,000 kg

Technical Specification


High Quality C45 Machined Steel
 Temperature range -30°C to +120°C

Characteristics


Very high load capacity, wear-resistant,
 shock-resistant, excellent resistance to lateral
 peak loads, super low rolling resistance




PFC Channel
 Parallel flange channel




A Tread Diameter (mm)	B OD of Flange (mm)	C Tread Width (mm)	D Total Width (mm)	E Bore Size (mm)	F Nut Width (mm)	G Thread Length (mm)	H Axle Size	Load Capacity (kg)	Product Code
55	70	25	35	20	15	52	M24	370	SSAP5525BJ
80	95	25	35	25	15	62	M24	700	SSAP8025BJ
100	115	25	35	25	19	62	M24	1,000	SSAP10025BJ
150	180	35	50	30	20	72	M24	1,500	SSAP15035BJ
200	230	35	50	40	20	72	M24	2,000	SSAP20035BJ



RSC Channel
 Rolled steel channel



A Tread Diameter (mm)	B OD of Flange (mm)	C Tread Width (mm)	D Total Width (mm)	E Bore Size (mm)	F Nut Width (mm)	G Thread Length (mm)	H Axle Size	Load Capacity (kg)	Product Code
55	70	25	35	12	10	40	M16	160	SSAR5525BJ
85	100	25	35	20	15	52	M24	370	SSAR8525BJ
105	125	25	35	25	15	62	M24	700	SSAR10525BJ
133	160	35	47	25	18	63	M30	1,000	SSAR13335BJ
175	200	35	50	30	20	73	M36	1,500	SSAR17535BJ

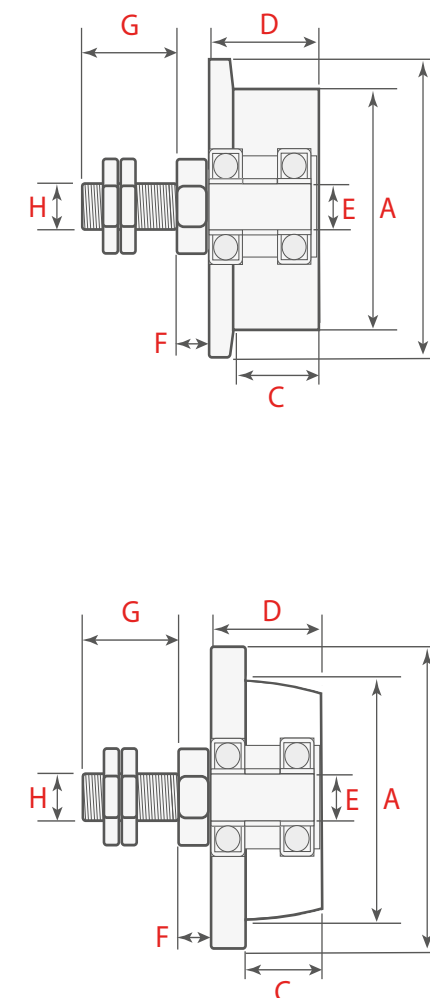

...Looking for the complete wheel system....don't forget your axles

Machined to your exacting requirements.....the complete solution without the risk of non-compatible parts

Steel, Stainless Steel, Aluminium or brass

....the possibilities are endless!

Precision manufacturing to ensure both wheel
 and axle fit perfectly...the one stop shop!



Single Flanged STEEL (C45) machined wheels

🌀 75 to 400 mm **KG** 900 to 14,400 kg


Technical Specification

High Quality C45 Machined Steel
 Temperature range -30°C to +120°C

Characteristics


Very high load capacity, wear-resistant, shock-resistant,
 excellent resistance to lateral peak loads, super low rolling
 resistance

A Tread Diameter (mm)	B OD of Flange (mm)	C Tread Width (mm)	D Total Width (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Bore	Product Code
75	100	25	37	37	20	900	Ball Bearing	75WMSFBJM20
75	100	25	37	37	25	975	Ball Bearing	75WMSFBJM25
100	125	25	37	37	20	900	Ball Bearing	100WMSFBJM20
100	125	25	37	37	25	1,140	Ball Bearing	100WMSFBJM25
150	180	40	55	55	25	1,140	Ball Bearing	150WMSFBJM25
150	180	40	55	55	30	2,040	Ball Bearing	150WMSFBJM30
200	240	55	70	70	30	2,040	Ball Bearing	200WMSFBJM30
200	240	55	70	70	35	2,800	Ball Bearing	200WMSFBJM35
200	240	55	70	70	40	3,380	Ball Bearing	200WMSFBJM40
250	290	55	70	70	35	2,800	Ball Bearing	250WMSFBJM35
250	290	55	70	70	40	3,380	Ball Bearing	250WMSFBJM40
250	290	55	70	70	50	7,100	Ball Bearing	250WMSFBJM50
300	345	60	80	80	40	4,400	Ball Bearing	300WMSFBJM40
300	345	60	80	80	50	7,340	Ball Bearing	300WMSFBJM50
350	395	60	80	80	50	7,340	Ball Bearing	350WMSFBJM50
350	395	60	80	80	60	9,000	Ball Bearing	350WMSFBJM60
350	395	60	80	80	75	9,785	Ball Bearing	350WMSFBJM75
400	450	70	100	100	60	9,000	Ball Bearing	400WMSFBJM60
400	450	70	100	100	75	9,785	Ball Bearing	400WMSFBJM75

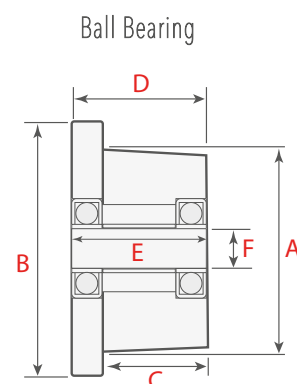

3°
Taper Tread
 3° taper tread as
 standard.
 Flat parallel treads are
 available on request

A Tread Diameter (mm)	B OD of Flange (mm)	C Tread Width (mm)	D Total Width (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Bore	Product Code
75	100	25	37	37	20	975	Keywayed	75WMSFKM20
75	100	25	37	37	25	975	Keywayed	75WMSFKM25
100	125	25	37	37	20	1,300	Keywayed	100WMSFKM20
100	125	25	37	37	25	1,300	Keywayed	100WMSFKM25
150	180	40	55	55	25	3,100	Keywayed	150WMSFKM25
150	180	40	55	55	30	3,100	Keywayed	150WMSFKM30
150	180	40	55	55	35	3,100	Keywayed	150WMSFKM35
200	240	55	70	70	30	5,700	Keywayed	200WMSFKM30
200	240	55	70	70	35	5,700	Keywayed	200WMSFKM35
200	240	55	70	70	40	5,700	Keywayed	200WMSFKM40
250	290	55	70	70	35	7,100	Keywayed	250WMSFKM35
250	290	55	70	70	40	7,100	Keywayed	250WMSFKM40
250	290	55	70	70	50	7,100	Keywayed	250WMSFKM50
300	345	60	80	80	40	9,300	Keywayed	300WMSFKM40
300	345	60	80	80	50	9,300	Keywayed	300WMSFKM50
350	395	60	80	80	50	10,800	Keywayed	350WMSFKM50
350	395	60	80	80	60	10,800	Keywayed	350WMSFKM60
350	395	60	80	80	75	10,800	Keywayed	350WMSFKM75
400	450	70	100	100	50	14,400	Keywayed	400WMSFKM50
400	450	70	100	100	60	14,400	Keywayed	400WMSFKM60
400	450	70	100	100	75	14,400	Keywayed	400WMSFKM75

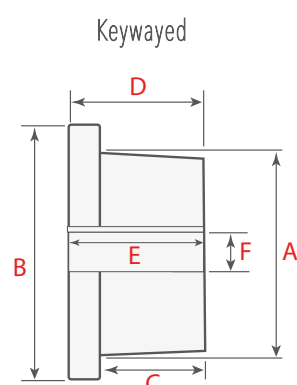

Keywayed
 Refer to the chart below

Wheel Bore Size (mm)	A Keyway Width (mm)	B Keyway Height (mm)
20	6	2.8
25	8	3.3
30	8	3.3
35	10	3.3
40	12	3.3
50	14	3.8
60	18	4.4
75	20	4.9

COMPLETE WHEEL SYSTEMS

+44 (0)1249 822 222
 wheelsystems@bilgroup.co.uk

Double Flanged STEEL (C45) machined wheels

🌀 75 to 350 mm **KG** 1,140 to 10,800 kg


Technical Specification

High Quality C45 Machined Steel
 Temperature range -30°C to +120°C


Characteristics

Very high load capacity, wear-resistant,
 shock-resistant, excellent resistance to lateral peak
 loads, super low rolling resistance

A Tread Diameter (mm)	B OD of Flange (mm)	C Tread Width (mm)	D Total Width (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Bore	Product Code
75	100	35	60	60	25	1,140	Ball Bearing	75WSTDfBJ25
75	100	35	60	60	30	1,350	Ball Bearing	75WSTDfBJ30
100	125	35	60	60	25	1,140	Ball Bearing	100WSTDfBJ25
100	125	35	60	60	30	1,800	Ball Bearing	100WSTDfBJ30
150	190	50	80	80	30	2,040	Ball Bearing	150WSTDfBJ30
150	190	50	80	80	35	2,800	Ball Bearing	150WSTDfBJ35
150	190	50	80	80	40	3,380	Ball Bearing	150WSTDfBJ40
200	240	50	90	90	40	3,380	Ball Bearing	200WSTDfBJ40
200	240	50	90	90	50	5,100	Ball Bearing	200WSTDfBJ50
250	295	60	100	100	50	7,340	Ball Bearing	250WSTDfBJ50
250	295	60	100	100	60	7,700	Ball Bearing	250WSTDfBJ60
300	345	55	100	100	50	7,340	Ball Bearing	300WSTDfBJ50
300	345	55	100	100	60	8,500	Ball Bearing	300WSTDfBJ60
300	345	55	100	100	75	8,500	Ball Bearing	300WSTDfBJ75
300	345	65	100	100	60	9,000	Ball Bearing	300WSTDfBJ60X
300	345	65	100	100	75	9,785	Ball Bearing	300WSTDfBJ75X
350	395	60	110	110	60	9,000	Ball Bearing	350WSTDfBJ60
350	395	60	110	110	75	9,785	Ball Bearing	350WSTDfBJ75

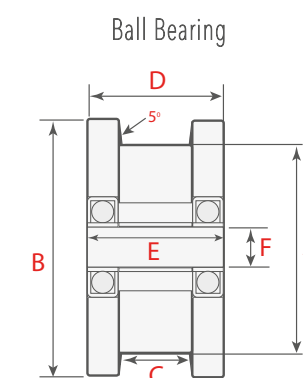

A Tread Diameter (mm)	B OD of Flange (mm)	C Tread Width (mm)	D Total Width (mm)	E Hub Width (mm)	F Bore Size (mm)	Load Capacity (kg)	Bore	Product Code
75	100	35	60	60	25	1,350	Keywayed	75WSTDfKM25
75	100	35	60	60	30	1,350	Keywayed	75WSTDfKM30
100	125	35	60	60	25	1,800	Keywayed	100WSTDfKM25
100	125	35	60	60	30	1,800	Keywayed	100WSTDfKM30
150	190	50	80	80	30	3,900	Keywayed	150WSTDfKM30
150	190	50	80	80	35	3,900	Keywayed	150WSTDfKM35
150	190	50	80	80	40	3,900	Keywayed	150WSTDfKM40
200	240	50	90	90	40	5,100	Keywayed	200WSTDfKM40
200	240	50	90	90	50	5,100	Keywayed	200WSTDfKM50
250	295	60	100	100	50	7,700	Keywayed	250WSTDfKM50
250	295	60	100	100	60	7,700	Keywayed	250WSTDfKM60
300	345	55	100	100	50	8,500	Keywayed	300WSTDfKM50
300	345	55	100	100	60	8,500	Keywayed	300WSTDfKM60
300	345	65	100	100	50	10,000	Keywayed	300WSTDfKM50X
300	345	65	100	100	60	10,000	Keywayed	300WSTDfKM60X
300	345	65	100	100	75	10,000	Keywayed	300WSTDfKM75X
350	395	60	110	110	50	10,800	Keywayed	350WSTDfKM50
350	395	60	110	110	60	10,800	Keywayed	350WSTDfKM60
350	395	60	110	110	75	10,800	Keywayed	350WSTDfKM75

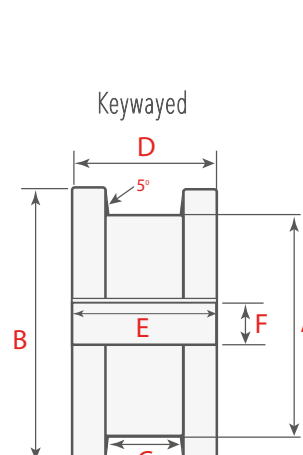

Keywayed
 Refer to the chart below


Wheel Bore Size (mm)	A Keyway Width (mm)	B Keyway Height (mm)
12	4	1.8
20	6	2.8
25	8	3.3
30	8	3.3
35	10	3.3
40	12	3.3
50	14	3.8
60	18	4.4
75	20	4.9

Rail sections

'A' Section Crane Rails

For use with single/double flanged and flat tread machined wheels. Rail sections
 supplied in 12 meter length as standard and can be joined if required.

A Rail Head Width (mm)	B Total Height (mm)	C Base Width (mm)	D Web Width (mm)	Rail Section Weight (kg/m)	Product Code
45	55	125	24	22.1	A45
55	65	150	31	31.8	A55
65	75	175	38	43.1	A65
75	85	200	45	56.2	A75
100	95	200	60	74.3	A100
120	105	220	72	100	A120
150	150	220	80	150.3	A150

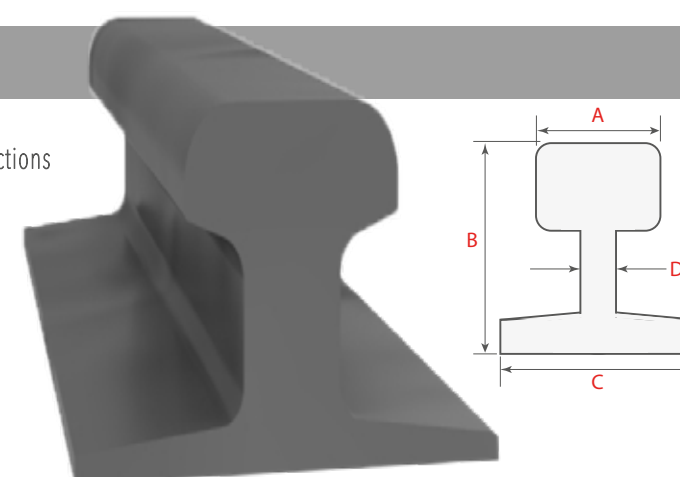

...Looking for the complete wheel system....don't forget your axles

Machined to your exacting requirements.....the complete solution without the risk of non-compatible parts

Steel, Stainless Steel, Aluminium or brass
the possibilities are endless!
 Precision manufacturing to ensure both wheel
 and axle fit perfectly...the one stop shop!



Vulkollan® Polyurethane guide rollers


40 to 100 mm


60 to 225 kg

Technical Specification


Polyurethane 92 Shore A with ball bearings (ZZ or 2RS)
 Temperature range -40°C to +85°C

Characteristics

A low-noise performance, wear-resistant, non-marking, hygienic, low starting and rolling resistance, low moisture absorbency, good chemical resistance to oils, greases and many other chemicals

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Product Code
40	15	10	8	60	VR5101101
50	15	10	8	85	VR5102101
50	15	10	9	85	VR5102105
50	15	12	8	85	VR5102121
50	18	17	10	95	VR5102171
50	20	12	10	100	VR5103121
60	18	17	10	110	VR5104171
60	20	20	12	120	VR5104201
70	20	20	12	130	VR5105201
70	25	25	12	150	VR5105251
70	25	20	14	150	VR5105203
70	25	20	15	150	VR5105205

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Product Code
80	20	25	15	150	VR5106251
80	25	25	15	170	VR5107251
90	20	25	15	170	VR5108251
90	25	25	12	190	VR5109251
100	20	25	15	190	VR5110251
100	25	25	15	210	VR5111251
100	30	25	15	225	VR5111301

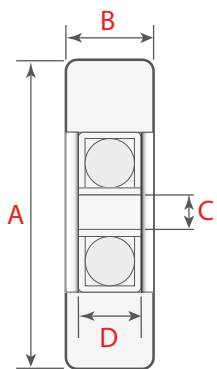

Vulkollan® Polyurethane wheels


100 to 300 mm


360 to 2,400 kg


Technical Specification

Polyurethane 92 Shore A with ball bearings, rugged cast iron, grey hammertone painted
 Temperature range -40°C to +80°C

Characteristics

Very high load capacity, wear-resistant, shock-resistant, excellent resistance to lateral peak loads, super low rolling resistance

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Bore	Product Code
100	40	15	45	360	Ball Bearings	VPT1004015BJ
100	40	20	45	360	Ball Bearings	VPT1004020BJ
125	35	15	44	380	Ball Bearings	VPT1253515BJ
150	40	20	40	530	Ball Bearings	VPT1504020BJ
150	40	25	40	530	Ball Bearings	VPT1504025BJ
150	50	20	50	700	Ball Bearings	VPT1505020BJ
150	50	25	50	700	Ball Bearings	VPT1505025BJ
200	50	20	60	1,000	Ball Bearings	VPT2005020BJ
200	50	25	60	1,000	Ball Bearings	VPT2005025BJ
200	50	30	60	1,000	Ball Bearings	VPT2005030BJ
200	65	25	65	1,100	Ball Bearings	VPT2006525BJ
200	65	30	65	1,100	Ball Bearings	VPT2006530BJ
200	80	30	80	1,400	Ball Bearings	VPT2008030BJ
250	50	20	60	1,350	Ball Bearings	VPT2505020BJ
250	50	25	60	1,350	Ball Bearings	VPT2505025BJ
250	50	30	60	1,350	Ball Bearings	VPT2505030BJ
250	80	25	80	1,800	Ball Bearings	VPT2508025BJ
250	80	30	80	1,800	Ball Bearings	VPT2508030BJ
250	80	35	80	1,800	Ball Bearings	VPT2508035BJ
300	50	30	60	1,200	Ball Bearings	VPT3005030BJ
300	80	30	80	1,900	Ball Bearings	VPT3008030BJ
300	100	40	100	2,400	Ball Bearings	VPT30010040BJ
300	100	50	100	2,400	Ball Bearings	VPT30010050BJ

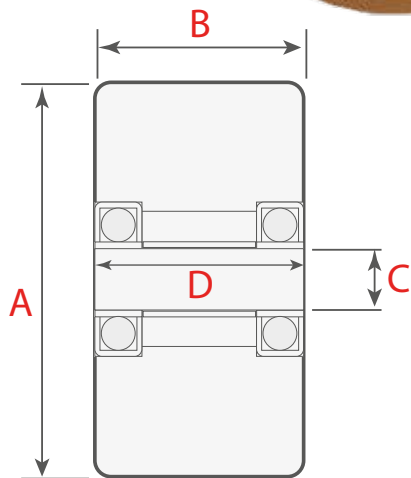

Cannot find what you are looking for?

.....Please contact us today as there are many other sizes and specifications available off the shelf, and made to order!

COMPLETE WHEEL SYSTEMS

+44 (0)1249 822 222
 wheelsystems@bilgroup.co.uk

Vulkollan® Polyurethane Drive wheels


100 to 300 mm


360 to 2,400 kg

Technical Specification


Polyurethane 92 Shore A H7 tolerance and a keywayed (DIN 6885 JS9), Wheel centre: closed rugged cast iron, grey hammertone painted
 Temperature range -40°C to +80°C

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Bore	Product Code
100	40	12	45	360	Keywayed	VPT1004012KM
100	40	20	45	360	Keywayed	VPT1004020KM
100	40	25	45	360	Keywayed	VPT1004025KM
100	40	30	45	360	Keywayed	VPT1004030KM
100	40	34	45	360	Keywayed	VPT1004034KM
125	35	12	44	380	Keywayed	VPT1253512KM
125	35	20	44	380	Keywayed	VPT1253520KM
125	35	25	44	380	Keywayed	VPT1253525KM
125	50	20	50	550	Keywayed	VPT1255020KM
125	50	25	50	550	Keywayed	VPT1255025KM
125	50	30	50	550	Keywayed	VPT1255030KM
125	50	35	50	550	Keywayed	VPT1255035KM
125	50	40	50	550	Keywayed	VPT1255040KM
150	35	15	44	450	Keywayed	VPT1503515KM
150	35	20	44	450	Keywayed	VPT1503520KM
150	35	25	44	450	Keywayed	VPT1503525KM
150	40	20	40	530	Keywayed	VPT1504020KM
150	40	25	40	530	Keywayed	VPT1504025KM
150	40	30	40	530	Keywayed	VPT1504030KM
150	40	35	40	530	Keywayed	VPT1504035KM
150	40	40	40	530	Keywayed	VPT1504040KM
150	50	20	50	700	Keywayed	VPT1505020KM
150	50	25	50	700	Keywayed	VPT1505025KM
150	50	30	50	700	Keywayed	VPT1505030KM
150	50	35	50	700	Keywayed	VPT1505035KM
150	50	40	50	700	Keywayed	VPT1505040KM
150	50	50	50	700	Keywayed	VPT1505050KM
200	50	20	50	1,000	Keywayed	VPT2005020KM
200	50	25	50	1,000	Keywayed	VPT2005025KM
200	50	30	50	1,000	Keywayed	VPT2005030KM
200	50	35	50	1,000	Keywayed	VPT2005035KM
200	50	40	50	1,000	Keywayed	VPT2005040KM
200	50	50	50	1,000	Keywayed	VPT2005050KM
200	65	25	65	1,100	Keywayed	VPT2006525KM
200	65	30	65	1,100	Keywayed	VPT2006530KM
200	65	35	65	1,100	Keywayed	VPT2006535KM
200	65	40	65	1,100	Keywayed	VPT2006540KM
200	65	50	65	1,100	Keywayed	VPT2006550KM
200	80	30	80	1,400	Keywayed	VPT2008030KM
200	80	40	80	1,400	Keywayed	VPT2008040KM
200	80	50	80	1,400	Keywayed	VPT2008050KM

Characteristics


Very high load capacity, wear-resistant, shock-resistant, excellent resistance to lateral peak loads, super low rolling resistance

A Diameter (mm)	B Tread Width (mm)	C Bore Size (mm)	D Hub Width (mm)	Load Capacity (kg)	Bore	Product Code
200	80	50	80	1,400	Keywayed	VPT2008050KM
250	50	20	60	1,350	Keywayed	VPT2505020KM
250	50	25	60	1,350	Keywayed	VPT2505025KM
250	50	30	60	1,350	Keywayed	VPT2505030KM
250	50	35	60	1,350	Keywayed	VPT2505035KM
250	50	40	60	1,350	Keywayed	VPT2505040KM
250	50	50	60	1,350	Keywayed	VPT2505050KM
250	80	35	80	1,800	Keywayed	VPT2508035KM
250	80	40	80	1,800	Keywayed	VPT2508040KM
250	80	50	80	1,800	Keywayed	VPT2508050KM
300	50	30	60	1,200	Keywayed	VPT3005030KM
300	50	35	60	1,200	Keywayed	VPT3005035KM
300	50	40	60	1,200	Keywayed	VPT3005040KM
300	50	50	60	1,200	Keywayed	VPT3005050KM
300	50	60	60	1,200	Keywayed	VPT3005060KM
300	80	30	80	1,900	Keywayed	VPT3008030KM
300	80	35	80	1,900	Keywayed	VPT3008035KM
300	80	40	80	1,900	Keywayed	VPT3008040KM
300	80	50	80	1,900	Keywayed	VPT3008050KM
300	80	60	80	1,900	Keywayed	VPT3008060KM
300	100	40	100	2,400	Keywayed	VPT30010040KM
300	100	50	100	2,400	Keywayed	VPT30010050KM
300	100	60	100	2,400	Keywayed	VPT30010060KM
300	100	75	100	2,400	Keywayed	VPT30010075KM



Keywayed
 Refer to the chart below

Wheel Bore Size (mm)	A Keyway Width (mm)	B Keyway Height (mm)
12	4	1.8
20	6	2.8
25	8	3.3
30	8	3.3
35	10	3.3
40	12	3.3
50	14	3.8
60	18	4.4
75	20	4.9

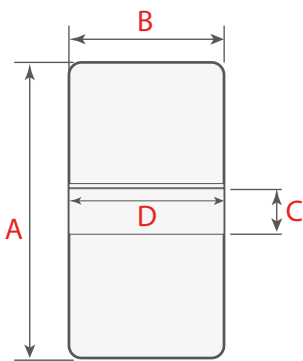

Plain bore versions are also available

...add "PB" to the end of the product code

Polyurethane Press on bands

🌀 150mm to 760 mm - 8" to 19" **KG** Application dependant

Technical Specification

Press-On tyres tyre, steel cylindrical inner ring, temperature range -40°C to +85°C.

Imperial

A Outer Diameter (inch)	B Tread Width (inch)	C Inner Diameter (inch)	Extra-High Load 92/95 Shore A Product Code	Extra-Flex 87 Shore A Product Code
8	2½	6	PBHL8X2.5-6	PBSF8X2.5-6
10	3	6½	PBHL10X3-6.25	PBSF10X3-6.25
10	3	8	PBHL10X3-8	PBSF10X3-8
10	4	6½	PBHL10X4-6.5	PBSF10X4-6.5
10	4	6½	PBHL10X4-6.25	PBSF10X4-6.25
10	5	6½	PBHL10X5-6.5	PBSF10X5-6.5
10¼	4	8	PBHL10.25X4-8	PBSF10.25X4-8
10½	3½	8	PBHL10.5X3.5-8	PBSF10.5X3.5-8
10½	4½	8	PBHL10.5X4.5-8	PBSF10.5X4.5-8
10½	5	6½	PBHL10.5X5-6.5	PBSF10.5X5-6.5
10½	5	8	PBHL10.5X5-8	PBSF10.5X5-8
10½	7	6½	PBHL10.5X7-6.5	PBSF10.5X7-6.5
12	2	10	PBHL12X2-10	PBSF12X2-10
12	3½	10	PBHL12X3.5-10	PBSF12X3.5-10
12	3	10	PBHL12X3-10	PBSF12X3-10
12	3	9½	PBHL12X3-9.5	PBSF12X3-9.5
12	4½	8	PBHL12X4.5-8	PBSF12X4.5-8
12	4	10	PBHL12X4-10	PBSF12X4-10
12	4	8	PBHL12X4-8	PBSF12X4-8
12	5½	7½	PBHL12X5.5-7.5	PBSF12X5.5-7.5
12	5	8	PBHL12X5-8	PBSF12X5-8
12	5	9	PBHL12X5-9	PBSF12X5-9
12½	2	10	PBHL12.5X2-10	PBSF12.5X2-10
12½	3½	10	PBHL12.5X3.5-10	PBSF12.5X3.5-10
12½	3	10	PBHL12.5X3-10	PBSF12.5X3-10
12½	5½	7½	PBHL12.5X5.5-7.5	PBSF12.5X5.5-7.5
12½	5½	8	PBHL12.5X5.5-8	PBSF12.5X5.5-8
12 ⅞	5½	9½	PBHL12.78X5.5-9.5	PBSF12.78X5.5-9.5
13	3½	10	PBHL13X3.5-10	PBSF13X3.5-10
13	3½	8	PBHL13X3.5-8	PBSF13X3.5-8
13	4½	10	PBHL13X4.5-10	PBSF13X4.5-10
13	5½	8	PBHL13X5.5-8	PBSF13X5.5-8
13	5½	7½	PBHL13X5.5-7.5	PBSF13X5.5-7.5
13	6	10½	PBHL13X6-10.5	PBSF13X6-10.5
13½	3	11¼	PBHL13.5X3-11.25	PBSF13.5X3-11.25
13½	3	12 ⅞	PBHL13.5X3-12	PBSF13.5X3-12
13½	5½	8	PBHL13.5X5.5-8	PBSF13.5X5.5-8
13½	5	10	PBHL13.5X5-10	PBSF13.5X5-10
14	3	11¼	PBHL14X3-11.25	PBSF14X3-11.25
14	4	11¼	PBHL14X4-11.25	PBSF14X4-11.25
14	5	10	PBHL14X5-10	PBSF14X5-10
14	5	11¼	PBHL14X5-11.25	PBSF14X5-11.25
14	5	8	PBHL14X5-8	PBSF14X5-8
14	6	11¼	PBHL14X6-11.25	PBSF14X6-11.25
14	8	10	PBHL14X8-10	PBSF14X8-10
15	3½	11¼	PBHL15X3.5-11.25	PBSF15X3.5-11.25
15	3	11¼	PBHL15X3-11.25	PBSF15X3-11.25
15	4½	11¼	PBHL15X4.5-11.25	PBSF15X4.5-11.25
15	4	11¼	PBHL15X4-11.25	PBSF15X4-11.25
15	6	10	PBHL15X6-10	PBSF15X6-10
15	7	11¼	PBHL15X7-11.25	PBSF15X7-11.25
15½	4	11¼	PBHL15.5X4-11.25	PBSF15.5X4-11.25
15¾	6¾	12½	PBHL15.75X6.75-12	PBSF15.75X6.75-12
15¾	8	12½	PBHL15.75X8-12	PBSF15.75X8-12
15¾	8¾	12½	PBHL15.75X8.75-15	PBSF15.75X8.75-15
16	3½	12½	PBHL16X3.5-12	PBSF16X3.5-12
16	3	12½	PBHL16X3-12	PBSF16X3-12
16	3	14	PBHL16X3-14	PBSF16X3-14
16	4	11¼	PBHL16X4-11.25	PBSF16X4-11.25

Metric

A Outer Diameter (mm)	B Tread Width (mm)	C Inner Diameter (mm)	Extra-High Load 98 Shore A Product Code	Extra-Flex 87 Shore A Product Code
150	50	100	PBHL150X50-100	PBSF150X50-100
150	75	100	PBHL150X75-100	PBSF150X75-100
200	75	140	PBHL200X75-140	PBSF200X75-140
235	120	145	PBHL235X120-145	PBSF235X120-145
250	100	185	PBHL250X100-185	PBSF250X100-185
250	105	170	PBHL250X105-170	PBSF250X105-170
250	130	140	PBHL250X130-140	PBSF250X130-140
250	80	170	PBHL250X80-170	PBSF250X80-170
250	90	190	PBHL250X90-190	PBSF250X90-190
254	120	190	PBHL254X120-190	PBSF254X120-190
254	140	144½	PBHL254X140-144.5	PBSF254X140-144.5
285	100	228	PBHL285X100-228	PBSF285X100-228
285	100	240	PBHL285X100-240	PBSF285X100-240
300	100	250	PBHL300X100-250	PBSF300X100-250
300	75	240	PBHL300X75-240	PBSF300X75-240
305	127	225	PBHL305X127-225	PBSF305X127-225
320	114	225	PBHL320X114-225	PBSF320X114-225
325	78	240	PBHL325X78-240	PBSF325X78-240
330	100	270	PBHL330X100-270	PBSF330X100-270
330	145	194	PBHL330X145-194	PBSF330X145-194
343	114	225	PBHL343X114-225	PBSF343X114-225
343	140	270	PBHL343X140-270	PBSF343X140-270
343	150	280	PBHL343X150-280	PBSF343X150-280
345	100	280	PBHL345X100-280	PBSF345X100-280
350	100	280	PBHL350X100-280	PBSF350X100-280
350	110	270	PBHL350X110-270	PBSF350X110-270
355	125	225	PBHL355X125-225	PBSF355X125-225
380	75	285	PBHL380X75-285	PBSF380X75-285
385	140	270	PBHL385X140-270	PBSF385X140-270
400	178	305	PBHL400X178-305	PBSF400X178-305
760	265	530	PBHL760X265-530	PBSF760X265-530

Extra-High Load
92/95 Shore A




Extra-Flex
87 Shore A

Extra-High Load 92/95 Shore A

A good alternative to vulkollan with excellent anti-hydrolysis properties. This hard wearing material can achieve high loads and withstand harsh environments. It is also good where wheels are running for long periods of time and experience heat build-up.

Extra-Flex 87 Shore A

An alternative to the Extra-High Load polyurethane but is slightly softer giving extra grip but it is not as hard wearing.

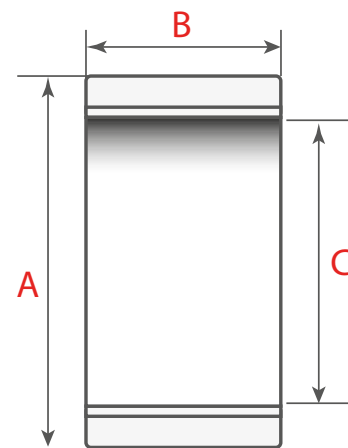

COMPLETE WHEEL SYSTEMS


+44 (0)1249 822 222
wheelsystems@bilgroup.co.uk

Cantilevered Axle Assemblies

Technical Specification

High Tensile Machined steel to BS970. Designed to mount single wheels. Measurement 'A' is designed to suit your internal bore dimension and measurement 'C' to suit the hub length of your wheel.

A To suit Axle Diameter (mm)	B Total Length (mm)	C Minimum Axle Hub Length (mm)	C Maximum Axle Hub Length (mm)	D Hex Nut Width (mm)	E Fixing Length (mm)	F Thread Diameter (mm)	G Hex Nut Diameter (A/F)	Recommended minimum mounting plate thickness (mm)	Load Capacity (kg)	Product Code
20	119	35	45	15	50	M27	32	12	350	CLA20
25	137	40	52	15	60	M30	36	16	600	CLA25
30	170	50	65	20	75	M36	46	18	825	CLA30
35	207	60	85	20	90	M42	50	22	1,100	CLA35

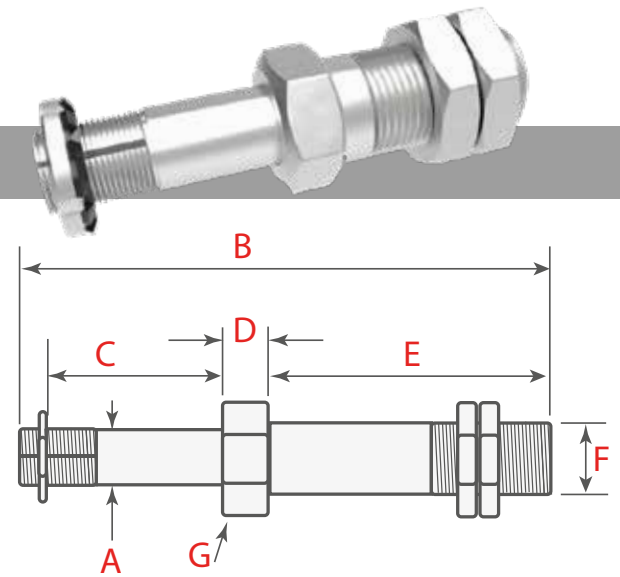


Single Mount Axle Assemblies

Technical Specification

High Tensile Machined steel to BS970. Designed to mount single wheels between the two axle blocks. Measurement 'A' is designed to suit your internal bore dimension and measurement 'D' to suit the hub length of your wheel. Supplied with two fixing blocks.

A To suit Axle Diameter (mm)	B Total Length (mm)	C Axle Shoulder Length (mm)	D Minimum Axle Hub Length (mm)	D Maximum Axle Hub Length (mm)	E *Maximum Block Position (mm)	F Shoulder Diameter (mm)	G Fixing Block Length (mm)	H Fixing Hole Centres (mm)	I Fixing Bolt (mm)	J Fixing Block Width (mm)	Load Capacity (kg)	Product Code
30	225	65	51	80	25	35	105	70	12	40	3,300	SMA30
35	225	65	51	80	25	40	105	70	12	40	7,000	SMA35
40	265	80	70	90	30	50	130	90	16	50	9,000	SMA40
50	340	105	80	110	40	60	170	120	20	65	14,000	SMA50
60	340	105	80	110	40	70	170	120	20	65	24,000	SMA60
75	390	120	80	125	40	85	210	150	24	80	40,000	SMA75

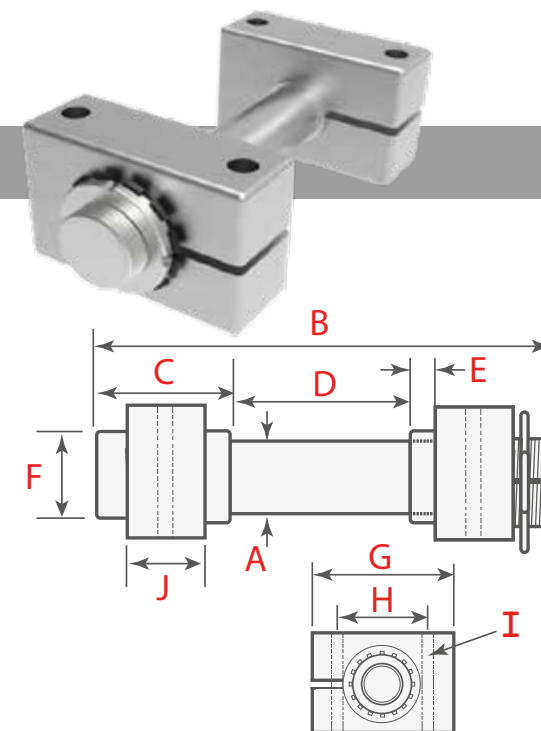


Double Mount Axle Assemblies

Technical Specification

High Tensile Machined steel to BS970. Designed to mount two wheels. Measurement 'A' is designed to suit your internal bore dimension and measurement 'D' to suit the hub length of your wheel. Supplied with two fixing blocks.

A To suit Axle Diameter (mm)	B Bar Diameter (mm)	C Total Mounting Length (mm)	D Minimum Wheel Hub Width (mm)	D Maximum Wheel Hub Width (mm)	E Block Width (mm)	F *Maximum Block Position (mm)	G Axle Block Length (mm)	H Fixing Hole Centres (mm)	I Fixing Bolt (mm)	Load Capacity (kg)	Product Code
25	30	62	40	52	40	75	105	70	12	1,500	DMA25#
30	35	75	50	65	40	75	105	70	12	2,500	DMA30#
35	40	97	60	85	40	100	105	70	12	3,000	DMA35#
40	50	113	85	100	50	100	130	90	16	4,000	DMA40#
50	60	128	85	110	65	120	170	120	20	6,300	DMA50#
60	70	130	85	110	65	120	170	120	20	8,500	DMA60#
75	85	150	85	110	65	150	210	150	24	12,000	DMA75#

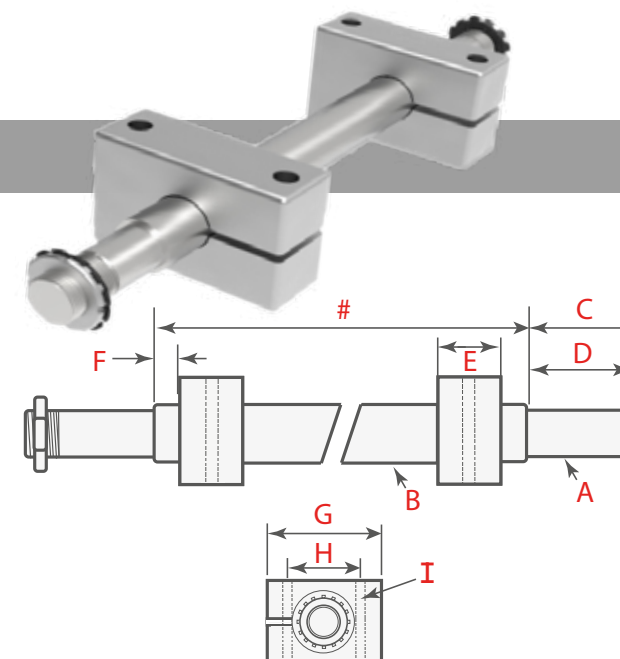

* Maximum dimension at which the load capacity applies (each end). Ask for more details

Donates your required length, specified by you!



BIL GROUP LIMITED

+44 (0)1249 822 222
wheelsystems@bilgroup.co.uk

Heavy Duty Castors - K Series

100 to 250 mm **KG** 250 to 1,500 kg

Technical Specification

- Single and Twin Wheel Options
- Fabricated Steel Case Hardened
- Single Piece Forged Swivel Head



Heavy Duty Castors - SAB Series

100 to 250 mm **KG** 210 to 1,500 kg

Technical Specification

- Single Wheel Options
- Fabricated Steel Thrust and Tapper
- Bearing Swivel Head, Nutted King Pin



Heavy Duty Castors - Q Series

150 to 300 mm **KG** 400 to 3,000 kg

Technical Specification

- Single and Twin Wheel Options
- Fabricated Steel Thrust and Tapper
- Bearing Swivel Head, Nutted King Pin



Heavy Duty Castors - QX Series

200 to 300 mm **KG** 1,400 to 5,000 kg

Technical Specification

- Single and Twin Wheel Options
- Fabricated Steel Thrust and Tapper
- Bearing Swivel Head, Nutted King Pin



COMPLETE WHEEL SYSTEMS

+44 (0)1249 822 222
wheelsystems@bilgroup.co.uk

Heavy Duty Castors - XXH Series

200 to 300 mm **KG** 1,400 to 7,500 kg

Technical Specification

- Single and Twin Wheel Options
- Fabricated Steel Case Hardened
- Single Piece Forged Swivel Head



Heavy Duty Castors - SZ Series

400 mm **KG** 9,200 to 11,500 kg

Technical Specification

- Twin Wheel Option
- Fabricated Steel Thrust and Tapper
- Bearing Swivel Head, Nutted King Pin




BIL Castors & Wheels division

Established in 1972 as a castor and wheel Distributor we have since evolved into one of the UK's largest manufacturers and stock holders in our industry.

Our most important asset is our employees. A team of experienced staff all share our collective vision and have been loyal to us on average for over 10 years, some over 30 years! This wealth of knowledge and commitment has enabled us to maintain our competitive edge.

Our Primary Goal is to simply provide the very best quality castors and wheels for our customers according to our core brand values.

- Quality
- Innovation
- Service
- Flexibility

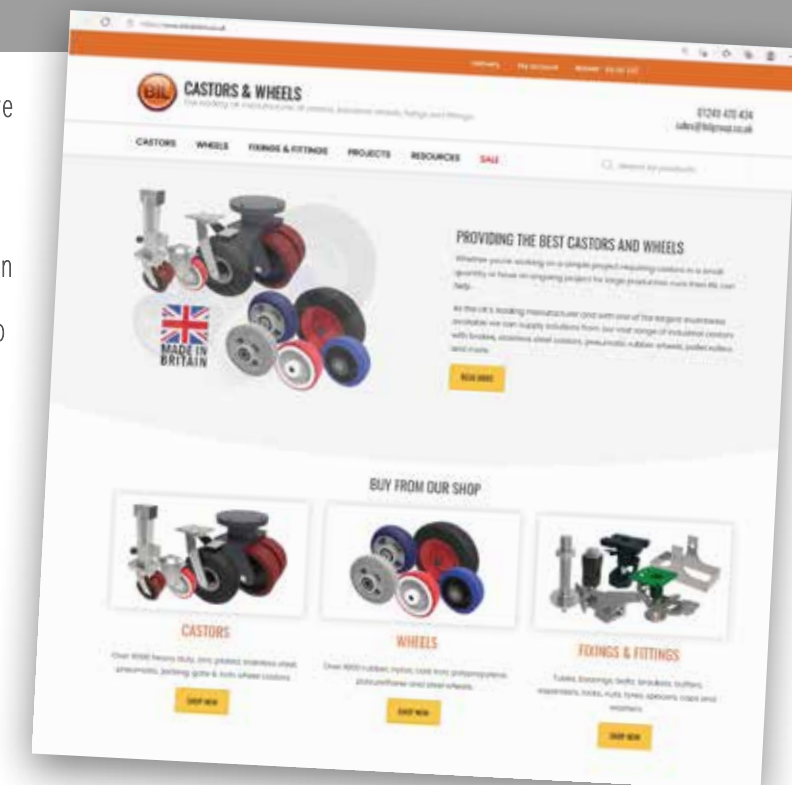

Please request one of our catalogues today or pay a visit to our website
www.bilcastors.co.uk



BIL GROUP LIMITED

☎ +44 (0)1249 822 222

✉ wheelsystems@bilgroup.co.uk

Porte Marsh Road, Calne, Wiltshire, SN11 9BW

