



Our premium range of welded steel and aluminium sack trucks

BILTruk® at first glance may look like 'just another sack truck range' however it is much more than that. Using our expertise, we have taken into full consideration all of the typical problem areas consistently found in more basic sack truck ranges commonly found in the marketplace.

The range consists of numerous sack trucks all manufactured to the highest standards and with effective improvements to ensure durability and longevity.

Quality designed products at an affordable price,
.....it really is as simple as that!



BIL[®]TRUK[®]



What makes BILTruk® different?

The BILTruk® range is a quality, entry level range of sack trucks. Through our experiences we have often been approached by customers who have had the same issues with their sack trucks, whether this be poor quality welds, poor wheel design and punctures, low quality material, poor axle design.. the list goes on and each point holding its own importance to overall quality of the sack truck. It can be easily forgotten that sack trucks are generally used every day and are often put through very strenuous situations. We have different options available each with their own price and unique benefits which is dependant on whether you require pneumatic or puncture proof tyre


CALL OR EMAIL TODAY FOR MORE DETAILS

Telephone +44 (0)1249 822 222 www.bilequipment.co.uk





Industry leading features with superior benefits

Manufactured using the highest quality materials and designed for continual use

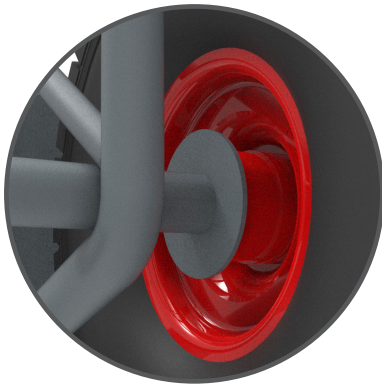



High strength solid axle bar on the Aluminium models, machined to 0.10/+0.1mm tolerance for a perfect fit. 2mm wall thickness steel tube on the Steel models. Both fitted with smooth rolling bearings.

High quality nylon grips. Tight interference fit and secured with self tapping screws to ensure the grip will never come off !!!

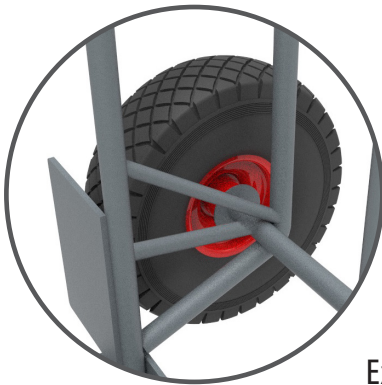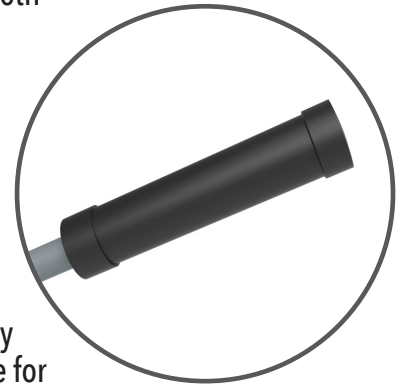



Crows Foot axle design for maximum strength, rigidity and longevity. The axle rod is fully welded and captive for superb impact load

Extra Strong Toe plate 5.5mm Thick, welded behind the frame for added durability and reduced chance of bending

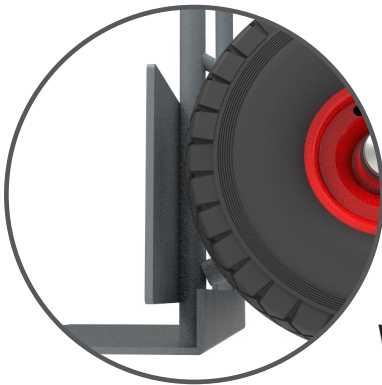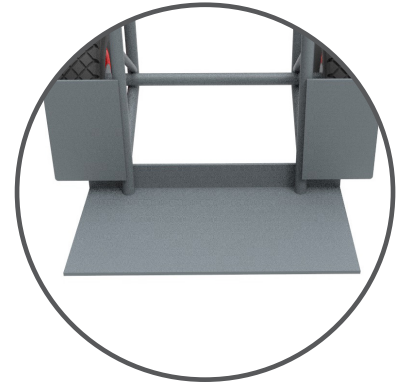

5mm thick wheel guard plate welded on both sides for maximum strength. In addition the wheel guards stabilise the load and prevent wheel splash. Wheel guard size: 160mm x 115mm x 5mm thick plate (4mm on Steel models)

Wheels without the wobble...All BILtruk's metal centres wheel hubs are precision engineered to the highest standard to avoid radial displacement. UK manufactured polypropylene hubs all fitted with premium quality tyres (Pneumatic or Puncture Proof)

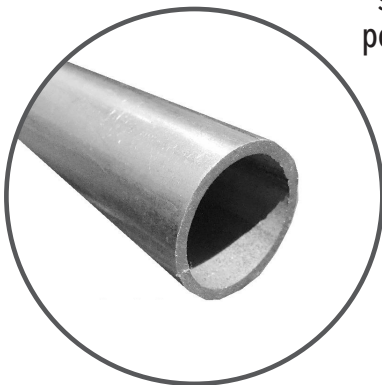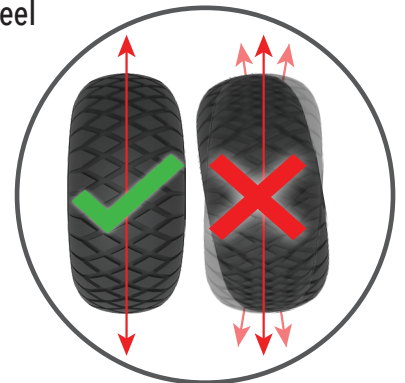

2mm wall thickness tube on the Aluminium models or 1.5mm wall thickness on Steel models. Maximum strength - Maximum rigidity

Branded personalised side strips available



1 YEARS WARRANTY

Telephone +44 (0)1249 822 222 www.bilequipment.co.uk