
T: 01249 822222
E: sales@bilgroup.co.uk
W: www.bilgroup.co.uk

Elastic Speed Rubber on Cast Iron Plate Fixed Castor 200mm 500kg Load

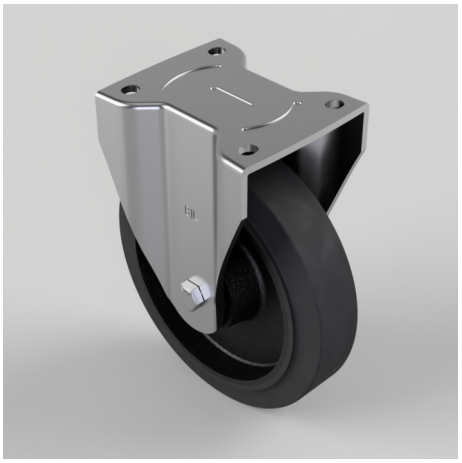

Product code: BZSPHF200CUBJ

Pressed steel fixed castor with a top plate fixing fitted with a black 65 shore A elastic rubber tyred on cast iron centre with ball bearings. Wheel diameter 200mm, tread width 50mm, overall height 238mm, top plate 135mm x 110mm, hole centres 105mm x 80/75mm and a Load capacity of 500kg at 4kph, 200kg at 10kph, 185kg at 16kph and 175kg at 20kph. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC **FOR INTERNAL TOWING ONLY**

Diameter (mm)	200
Castor Type	Fixed
Fixing Option	Plate
Height (mm)	238
Wheel Material	Rubber on Cast Iron
Colour / Shore Hardness	Black Elastic Rubber on Cast Iron Rim / 65 Shore A
Temperature Resistance	-20°C to +60°C
Bearing Type	Ball
Load Capacity (kg)	500
Tread (mm)	50
Plate Size (mm)	135 x 110
Hole Centres (mm)	105 x 80/75
Top Plate Thickness (mm)	5
Fork Thickness (mm)	5
To Suit Fixing Bolt (mm)	10
Castor Material	Zinc plated