

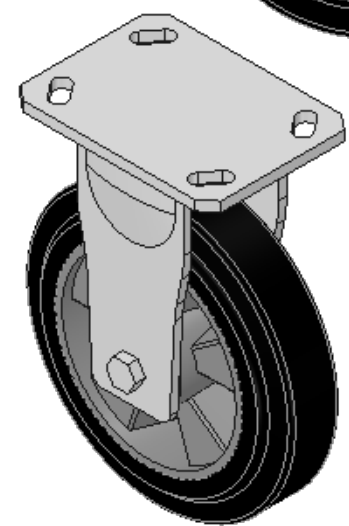
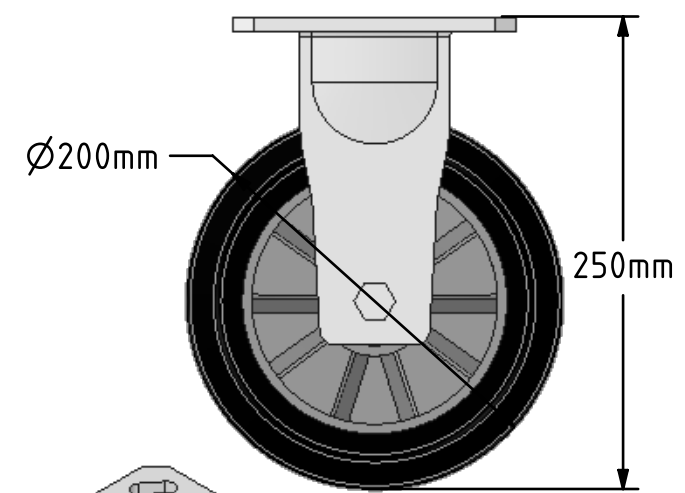


**DRAWING DISCLAIMER**  
 COPYRIGHT OF THIS DRAWING IS RESERVED BY BIL GROUP LTD. IT IS ISSUED ON CONDITION THAT IT IS NOT REPRODUCED, COPIED, OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF BIL GROUP LTD.

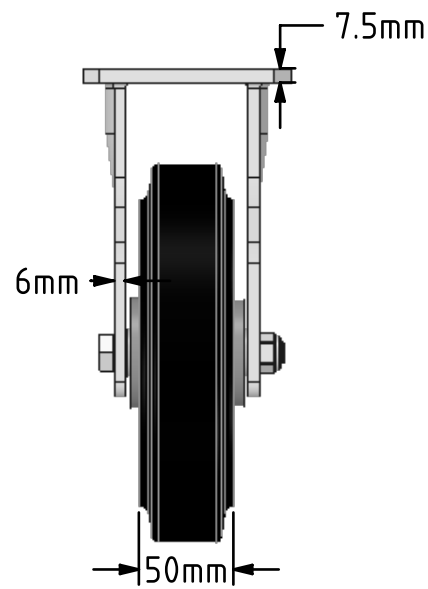

**Description:**  
 BZKF200ERBJ  
 Fabricated fixed castor with a flat plate fixing fitted with a black high elastic natural 65 shore A rubber tyre on aluminium centre with ball bearing. Wheel diameter 200mm, tread width 50mm, overall height 250mm, plate size 150mm x 110mm, hole centres 105mm x 80mm or 121mm x 59mm. Load capacity 500kg. REACH compliant also PAH-Free rubber to confirm to EU-directive 2005/69/EC

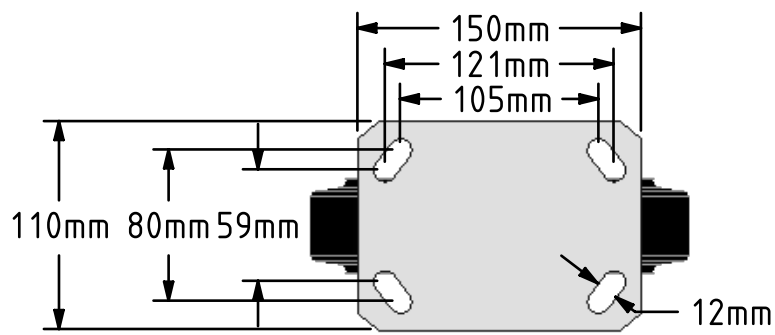

	NAME	DATE
DRAWN	Matt	10/05/18
APPROVED BY	Tim W	10/05/18
SCALE	1:4	10/05/18
WEIGHT	3.54kg	10/05/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES  
 Unspecified Tolerances  
 Machining ± 0.25mm  
 Fabrication ± 1mm

**BIL** BIL Group Ltd, Porte Marsh Road, Calne Wiltshire, SN11 9BW, United Kingdom  
 Tel +44 (0)1249 822 222 Fax: +44 (0)1249 822 300  
 www.bilgroup.co.uk

TITLE  
**BZKF200ERBJ**

SIZE	DWG NO.	REV
A4	BILCW03BZKF200ERBJ_01	1
FILE NAME	BILCW03BZKF200ERBJ_01.PDF	SHEET 1 OF 1